


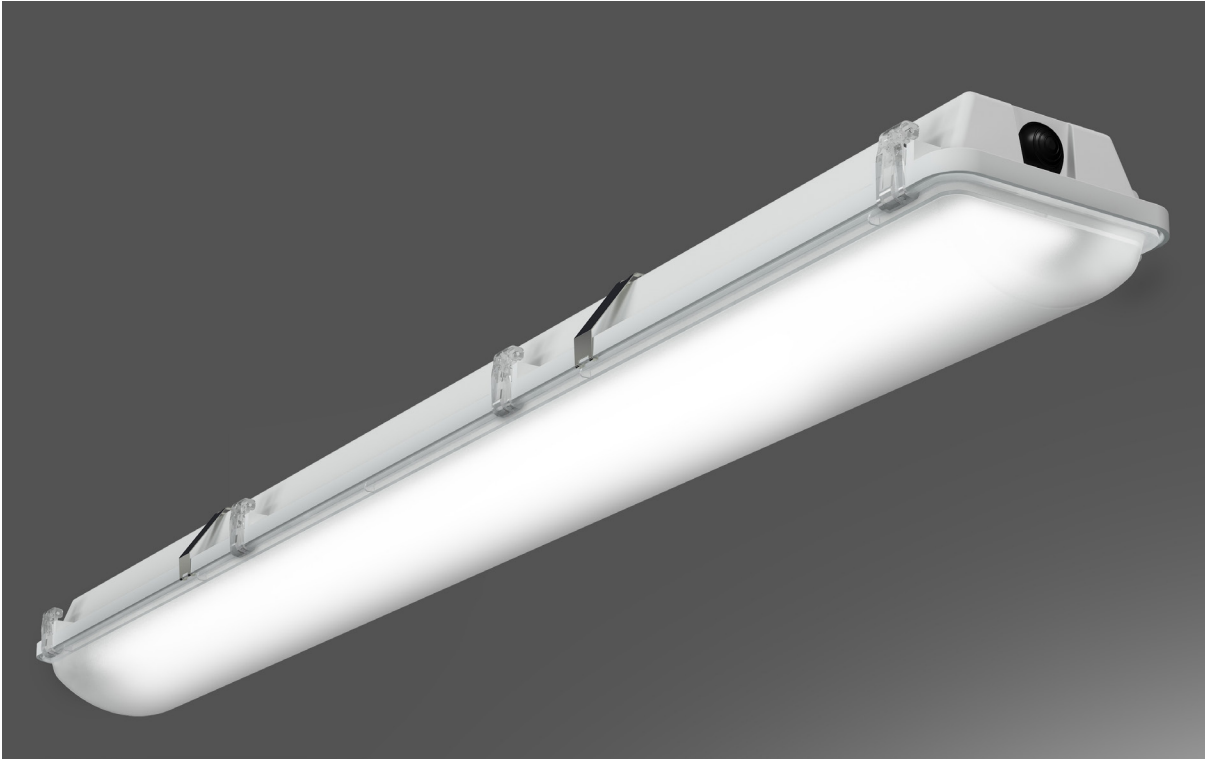

WARNINGS:

- Do not assemble continuous run on the ground and lift into place. Joints will distort and not create a tight fit. Joining hardware will have to be purchased and replaced.
- Risk of electrical shock or fire, disconnect power during installation or servicing. Read all instructions completely before starting installation. Install and wire in accordance to all national and local codes by a certified electrician. Fixture may be sharp, handle with care. Let fixture cool before maintenance.

AVERTISSEMENTS:

- Risque d'électrocution ou d'incendie. Déconnectez l'alimentation durant l'installation ou la maintenance. Lisez attentivement toutes les instructions avant de commencer toute installation. Faites installer et câbler selon les normes Nationales et Locales par un électricien certifié. Les installations peuvent être coupantes, à manipuler avec précaution. Laissez refroidir les installations avant une opération de maintenance.

ADVERTENCIA:

Riesgo de descarga eléctrica o un incendio, desconecte la alimentación durante la instalación o servicio. Leer todas las instrucciones completas antes de empujar la instalación. Instalar y cablear en acuerdo a las reglas nacionales y códigos locales por un electricista certificado. El accesorio puede estar agudo, agarre con cuidado deje que el accesorio. Enfriar antes de mantenimiento.



1

Un-snap lens retention clips, first pull tab away



2

Then push clips down and rotate outwards




3

All 8 clips unsnapped




4

Remove lens

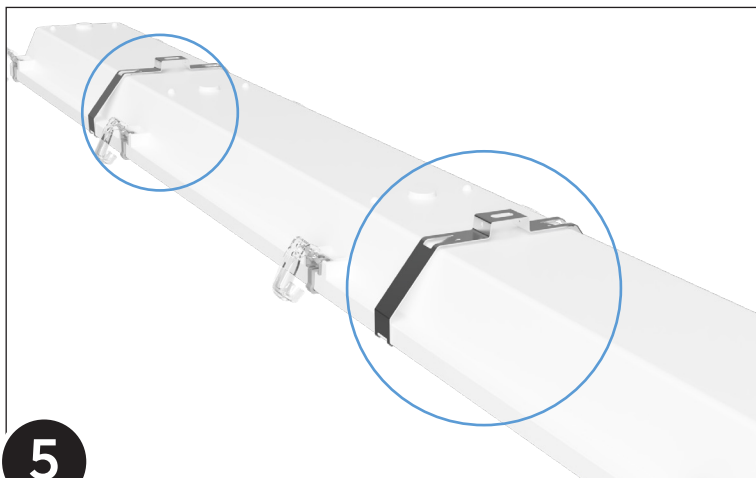


5

Locate mounting brackets, brackets must be removed to install luminaire

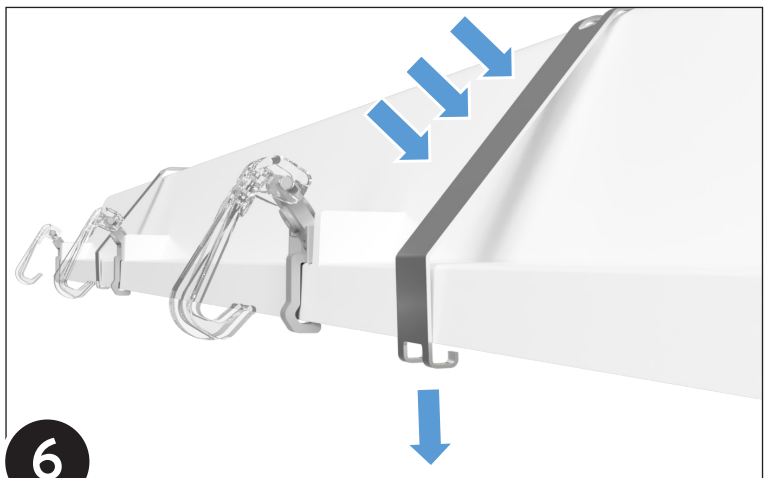


6

To remove bracket, press hard in middle of angled section and bracket will spring down for removal

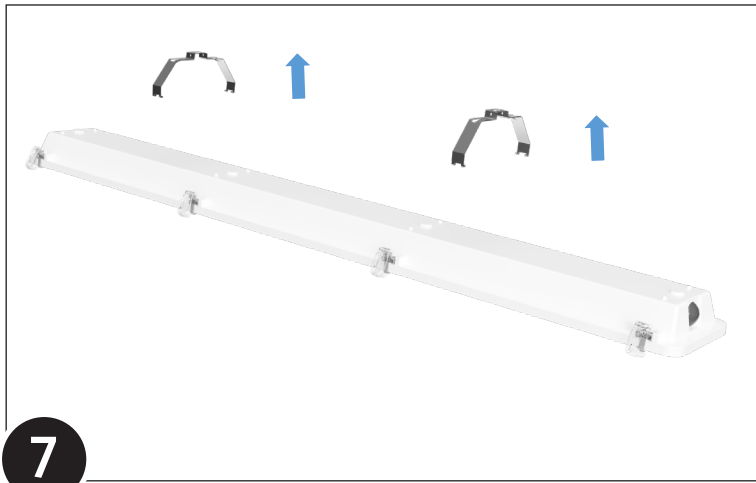


7

Mounting brackets removed

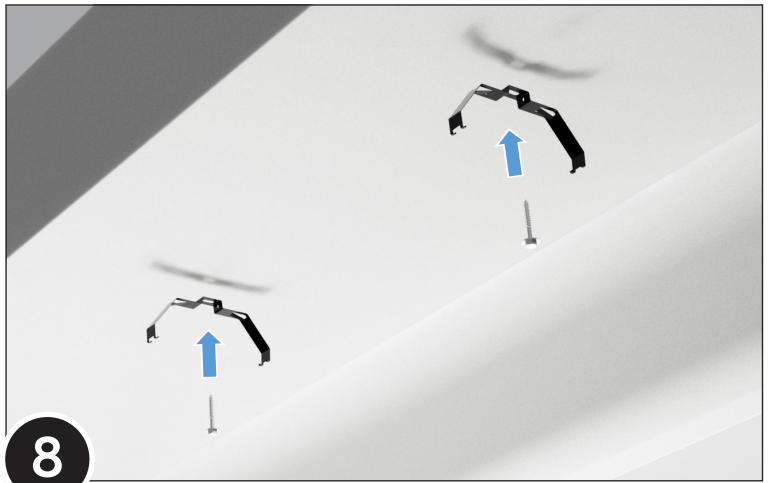


8

Mount brackets to building structure (hardware by others)

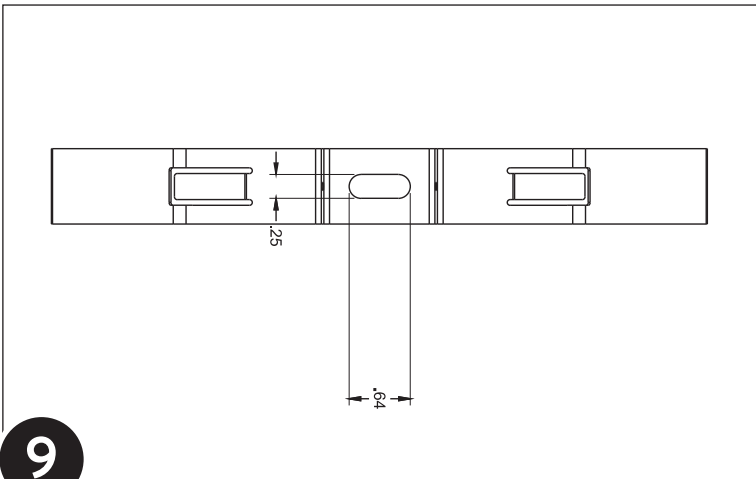


9

Bracket mounting hole dimensions

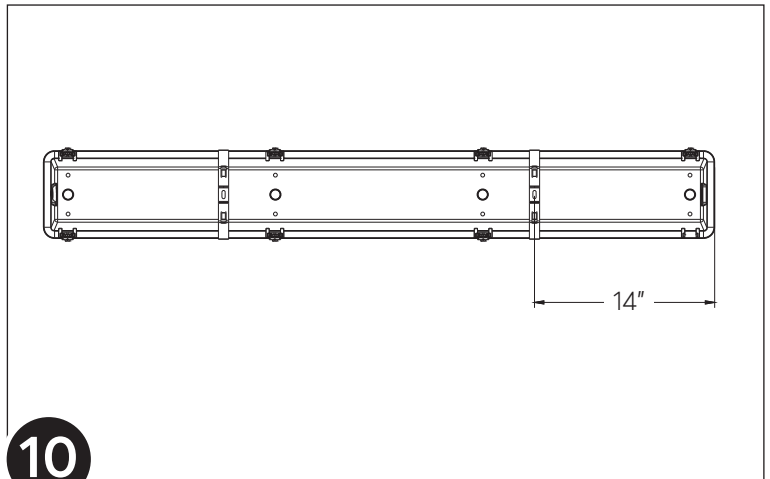

10

Mounting bracket centerline should be 14" from end of fixture

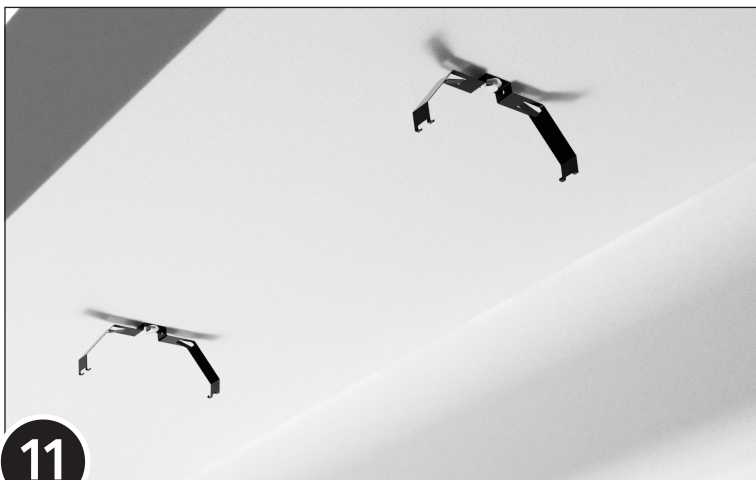


11

Mounting brackets installed




12

Snap fixture into place, ensuring brackets overlap the fiberglass body

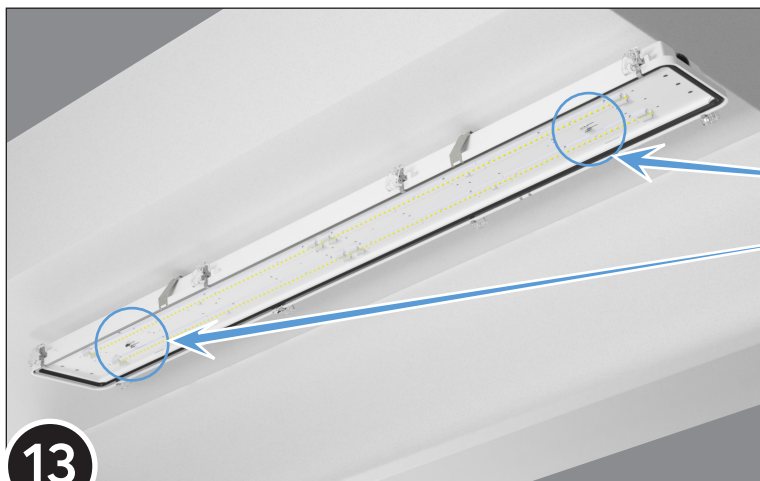


13

Remove gear tray by depressing spring tabs

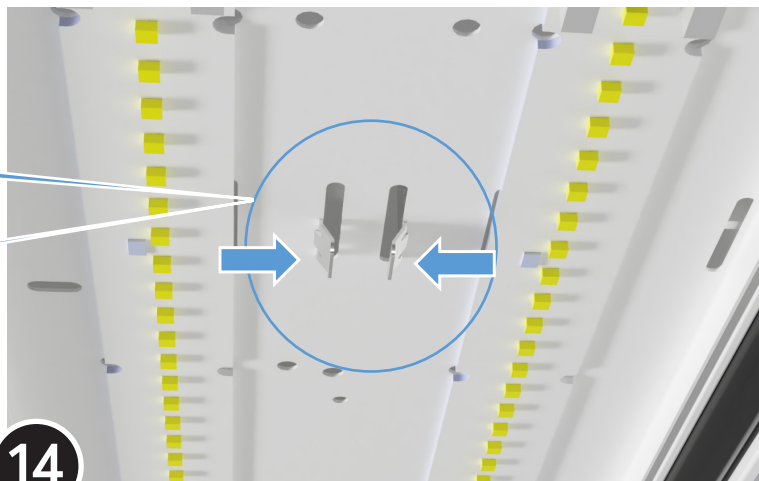


14

Depress each spring tab by pushing the tabs towards each other

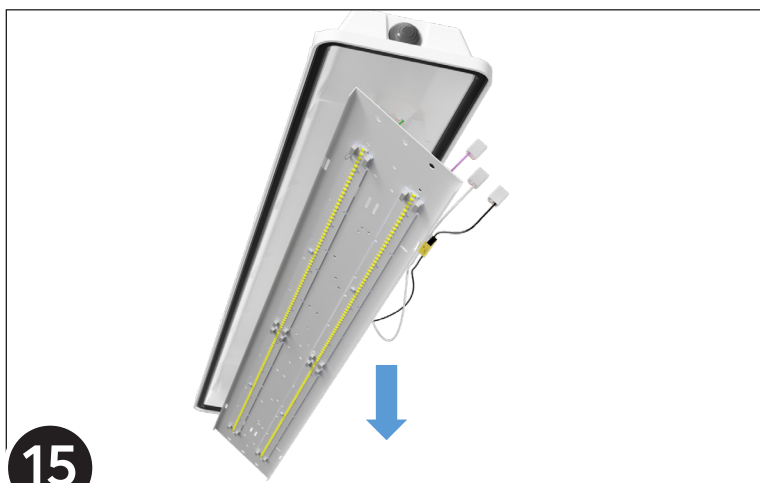


15

Gently drop gear tray down

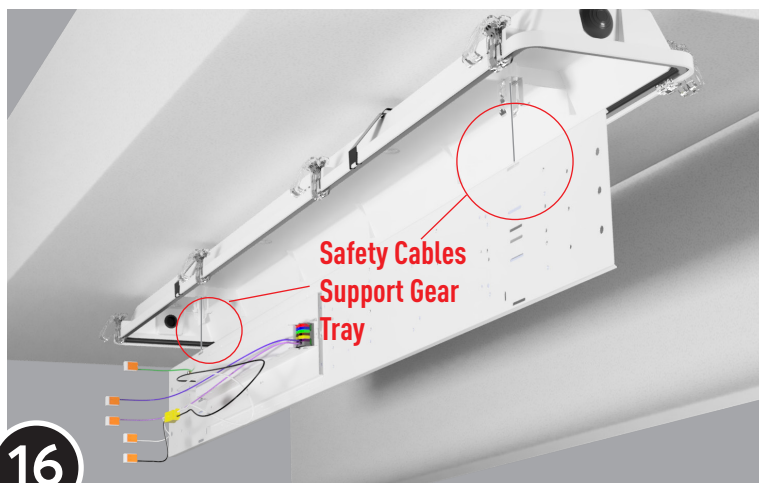


16

Safety cable will support gear tray for hands free wiring

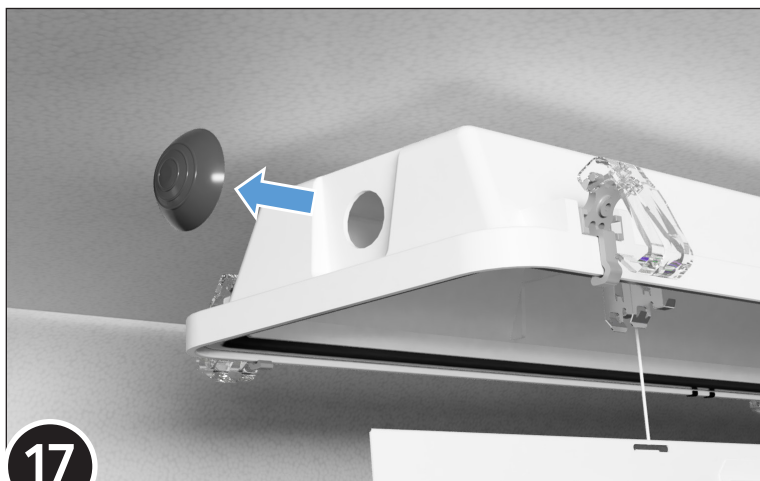


17

To wire fixture remove end plug

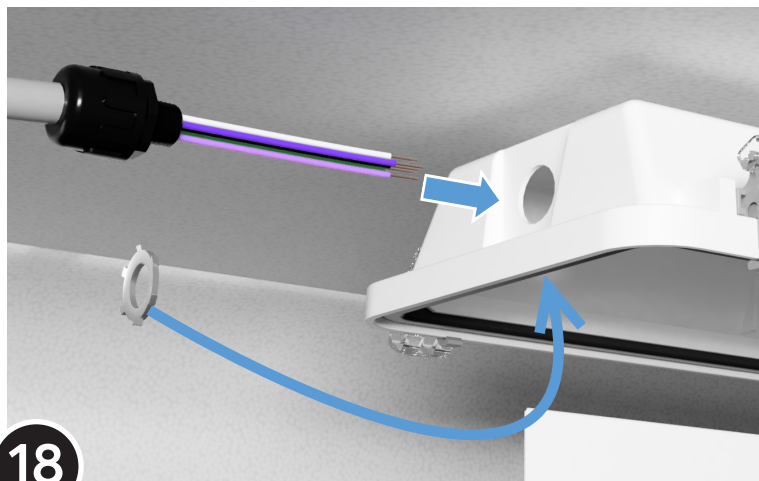


18

Attach water tight power cord, cord can be supplied by Nulite as an option or "by others"

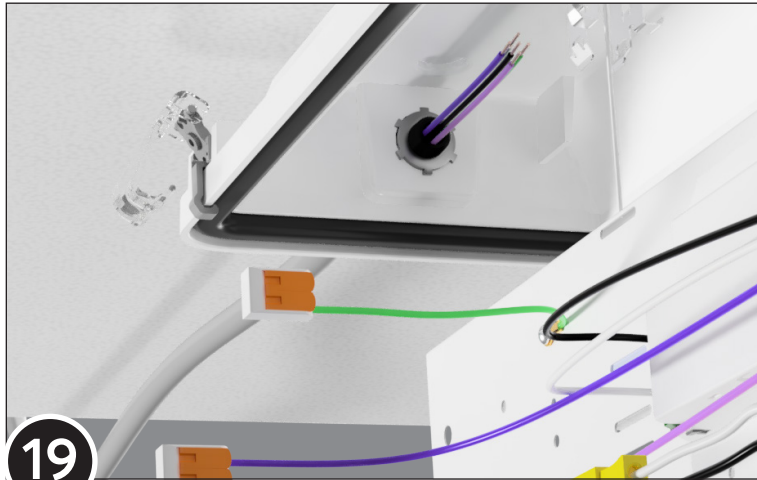

19

Attach cord to fixture body with lock washer (view from inside)

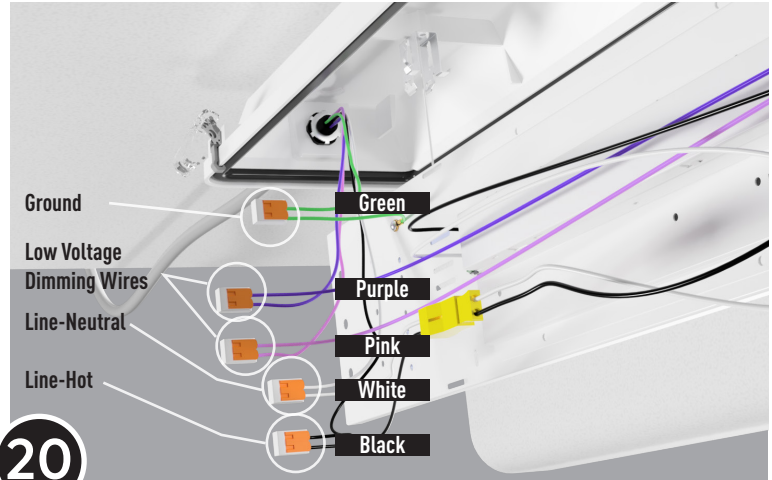


20

Make wire connections as shown with Nulite supplied quick wire connectors



21

Re-attach gear tray with captive spring tabs

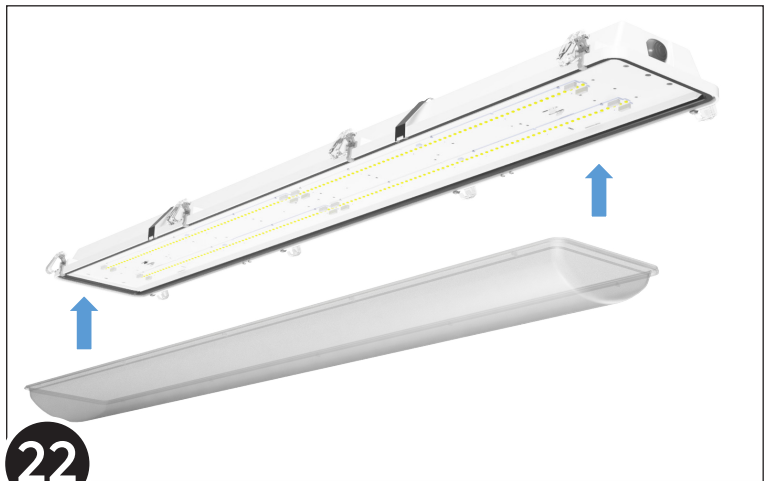


22

Re-install lens by reengaging lens retention clips



23

Fixture installation complete!

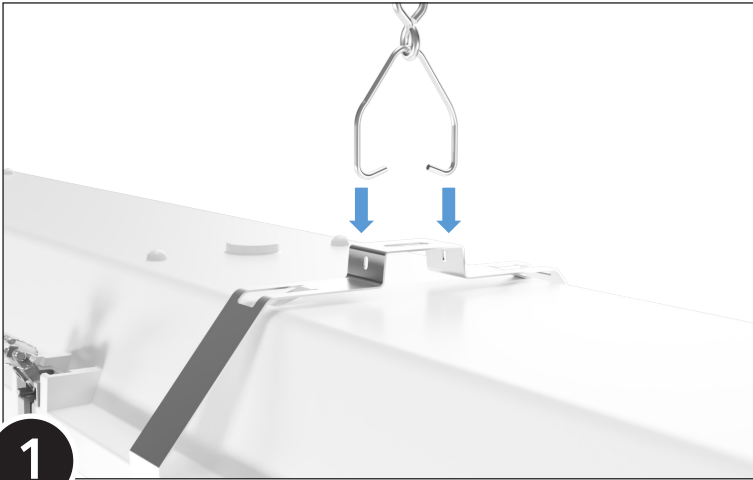

1

For pendant installation Nulite offers optional “Jack Chain” assembly that snaps into mounting bracket



2

“Jack Chain” connection to structure method by contractor

Follow steps 13-23 for the remainder of pendant installation