


NULITE

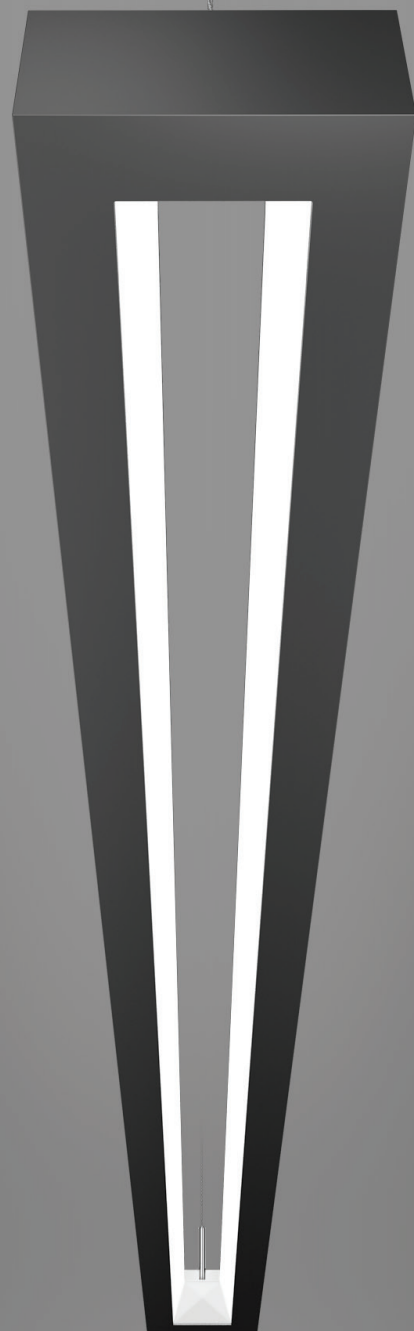

QūB

PENDANT LUMINAIRE

UNLIMITED POSSIBILITIES FOR TIMELESS INSPIRATION

A modern expression of lighting technology, the Qūb is a sleek and elegant luminaire that creates a sense of visual interest by use of a unique see-through aperture. The open optical system utilizes a reflector design that shields the light source to reduce glare and delivers both direct and indirect lighting with exceptional uniformity. Offered with 3-way and 4-way connectors and in natural wood grain finishes, the Qūb adds a contemporary touch to any space.





CREATE, CONFIGURE, INSPIRE

Unlimited configurations and standard pendants enable the creation of visually inspiring lighting. By utilization of a 3-way or 4-way connector, designers will stimulate a new level of design and creativity in the modern workspace.




Delicate Straight Wood Grain



Light Black Gunstock Wood Grain





Two-Tone Ash Gray Wood Grain

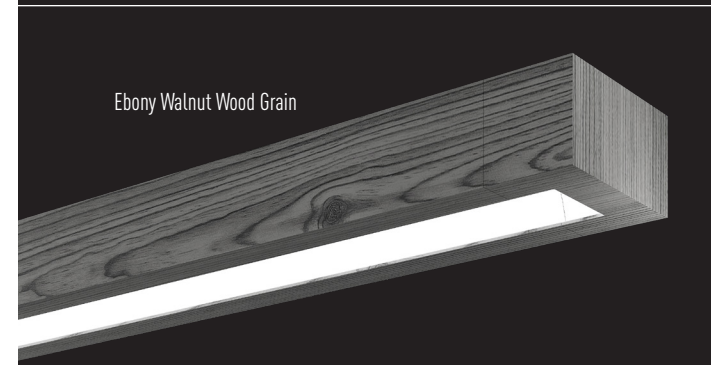

Ebony Walnut Wood Grain


GET BACK TO NATURE

Four unique wood grain finishes bring warmth to the traditional office environment. With the opportunity to tie the luminaire with other key objects and elements within a space, designers will elevate any environment to an aesthetically appealing setting.

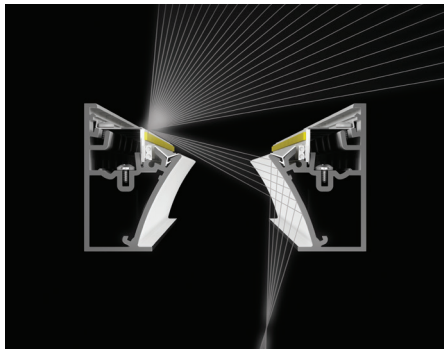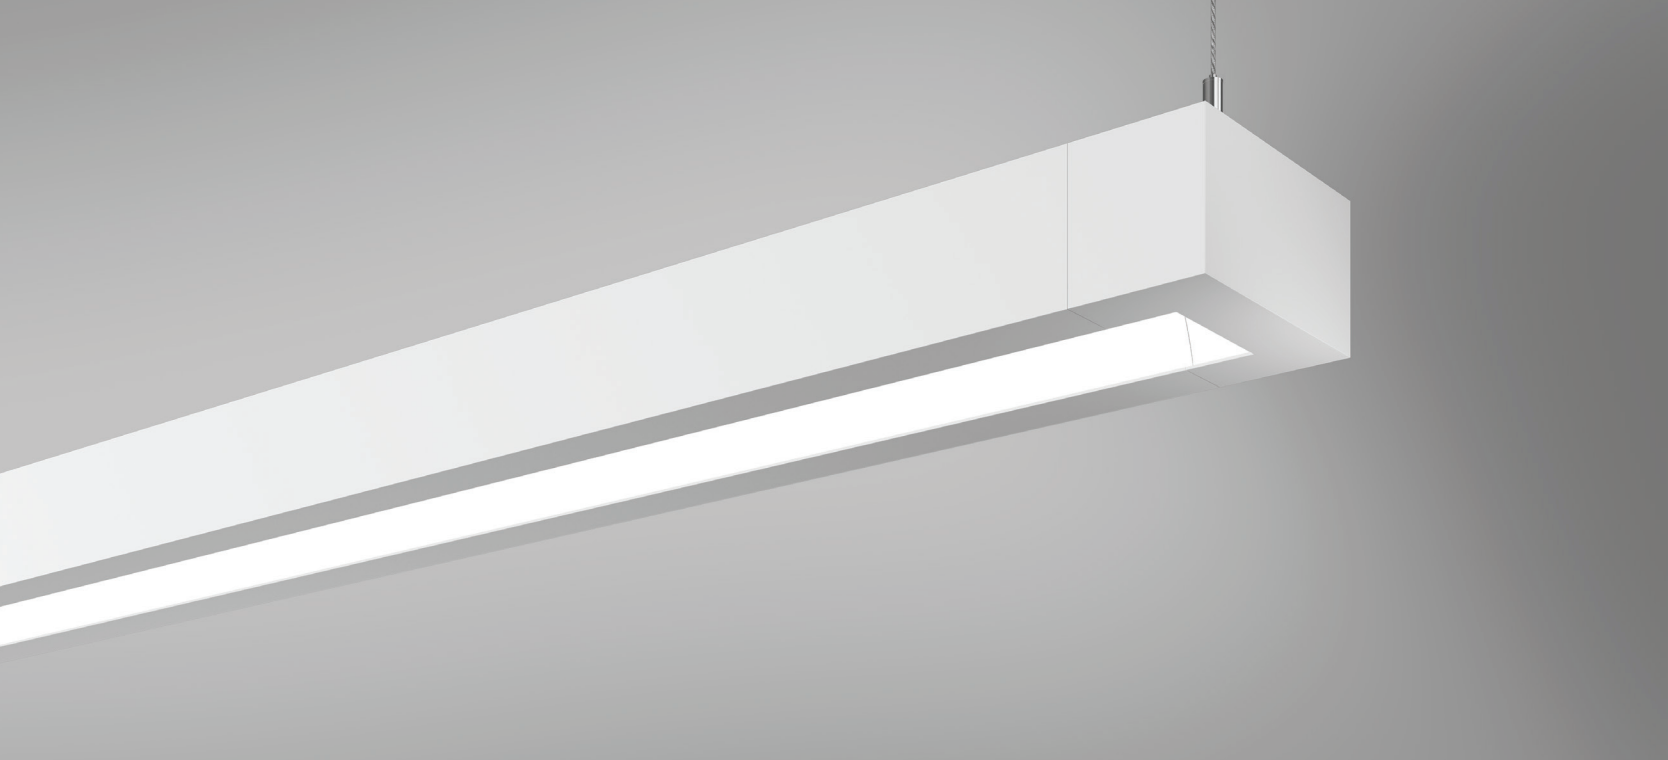


ADVANCED OPTICS

QÜb's open optical system creates an optimal direct-indirect light distribution through the precise design and alignment of LED emitters and luminaire reflective surfaces.

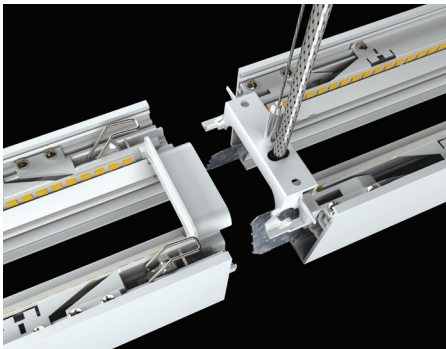

INNOVATIVE ENGINEERING

Nulite's highly engineered luminaire joining design allows for simple and intuitive assembly in the field without tools. It's torsion latches act as springs and ensure that luminaire rows snap into a laser straight line.

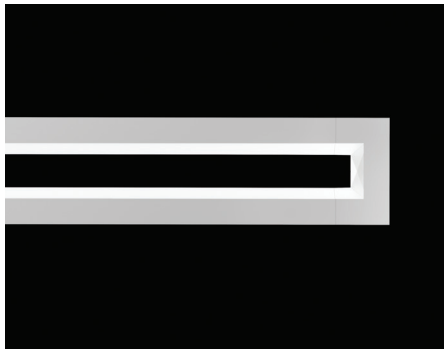


MODERN DESIGN

QÜb's timeless and minimalist design complements any interior architectural environment.



SIMPLE INSTALLATION

Unique small-scale canopy power supply works with all types of ceilings while fitting into the tightest spaces. Innovative canopy design allows for driver access without removing the luminaire.

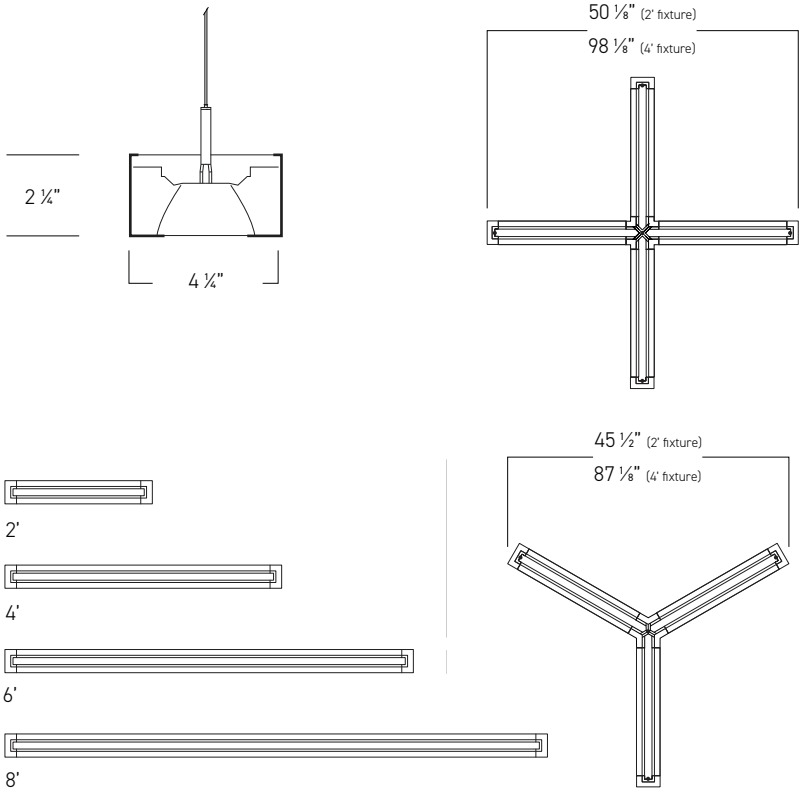

CONSTRUCTION Extruded aluminum housing with die cast aluminum end caps. Powder coat white finish is standard. Optional silver, black, custom colors, delicate straight wood grain, light black gunstock wood grain, two-tone ash gray wood grain, or ebony walnut wood grain finishes.

OPTICS Open optical system creates an optimal direct-indirect light distribution through the precise design and alignment of LED emitters and luminaire painted reflector surfaces.

DRIVER/ENCLOSURE Standard constant current electronic driver housed in a separate enclosure with 0-10V dimming input; dimming range from 100% down to 1%, other dimming options are available. One remote driver enclosure per unit. Universal (UNV) voltage is from 120 - 277V, 50/60 Hz. Tunable white requires TWV 0-10V or TWD DALI Eldoled Dualdrive driver..

LED MODULE Distributed LED array in a variety of lumen output packages. LED color is available in 3000K, 3500K or 4000K with CRI of 80 or 90. Modules are replaceable. L90 ≥ 100,000 hours. Tunable white module utilizes 50% 2700K and 50% 6500K diodes with a CRI of 90.

MOUNTING Pendant, linear individual or continuous run.

LABELS ETL listed, conforms to UL Standard 1598 / 8750 and CSA Standard C22.2. Damp location.

WARRANTY 5-year limited warranty on LED and Driver.

3-WAY AND 4-WAY CONNECTORS Standard leg lengths for 3-way and 4-way connectors are 2' or 4'. Custom configurations are available. Consult factory for more information.

- Notes:
1. Nominal lumen output for 3500K, 80 CRI
 2. Consult factory for custom lumen package
 3. Tunable white requires TWV 0-10V or TWD DALI Eldoled Dualdrive driver
 4. Consult factory for additional options
 5. Consult factory for specifications and custom dimming options
 6. Standard pendant size for 3-Way and 4-Way connectors are 2' or 4' legs. Custom configurations available.
 7. Specify run length in 2' increments

SERIES			
QUB - QÜb remote pendant			
LIGHT DISTRIBUTION			
20 - 16% downlight / 84% Uplight			
LUMEN PACKAGE¹			
Linear Pendant 08 - 856 lms/ft 11 - 1103 lms/ft 13 - 1377 lms/ft		Pendant 05 - 500 lms/ft 08 - 800 lms/ft 11 - 1100 lms/ft XX²	
15 - 1575 lms/ft 19 - 1908 lms/ft XX²			
CRI / CCT			
L30 - 3000K, 80 CRI L35 - 3500K, 80 CRI L40 - 4000K, 80 CRI		H30 - 3000K, 90 CRI H35 - 3500K, 90 CRI H40 - 4000K, 90 CRI	
		TW³ - Dynamic white tuning from 2700K to 6500K with a CRI of 90	
CIRCUIT⁴			
1C - Single Circuit 1E - Single Circuit w/EM Circuit 1B5 - Single Circuit with 5W Battery Pack		1B7 - Single Circuit with 7W Battery Pack 1B10 - Single Circuit with 10W Battery Pack 1B12 - Single Circuit with 12W Battery Pack	
		CEC - CEC Compatible (10W Battery Pack)	
VOLTAGE			
U - Universal 1 - 120 Volt 2 - 277 Volt			
DRIVER⁵			
Dimming 0 - 10V D - Dim to 1% (Standard) D0 - Dim to 1%, fade to off D02 - Eldoled Solodrive, dims to 0%		Tunable White TWV - 0-10V, dims to 0% TWD - DALI Eldoled Dualdrive, dims to 0% DALI Dimming ELE - Eldoled Ecodrive, dims to 1% ELS - Eldoled Solodrive, dims to 0%	
		Lutron L12 - Lutron HiLume™ 2-Wire 120V Forward Phase, dims to 1% L15 - Lutron HiLume™ H-Series, dims to 1% L16 - Lutron HiLume™ 5-Series, dims to 5%	
LUMINAIRE FINISH			
W - White (Standard) S - Silver B - Black		CC⁴ - Custom Color ST⁴ - Delicate Straight Wood Grain BG⁴ - Light Black Gunstock Wood Grain	
		AG⁴ - Two-Tone Ash Gray Wood Grain EW⁴ - Ebony Walnut Wood Grain	
CANOPY FINISH			
W - White (Standard) B - Black			
MOUNTING / SUSPENSION LENGTH (IN INCHES)			
Grid Ceiling Plenum Enclosure T1 / 48 T1 / 120 T9 / 48		Grid Ceiling Plenum Enclosure T9 / 120 TS / 48 TS / 120	
		Sheet Rock/Grid Ceiling Enclosure GP / 48 GP / 120	
		Surface Enclosure SR / 48 SR / 120 SR-BAT / 48 (with battery) SR-BAT / 120 (with battery)	
LENGTH⁶		OPTIONS	
2 - 2 ft 4 - 4 ft 6 - 6 ft 8 - 8 ft XX⁷ - x ft		N - Nightlight GTD - Remote generator transfer device GLR - Remote fusing ETS - Remote electronic transfer switch CP - Chicago plenum	



NULITE

10770 EAST 51ST AVENUE / DENVER, COLORADO 80239

P 303 287 9646 / WWW.NULITE-LIGHTING.COM