


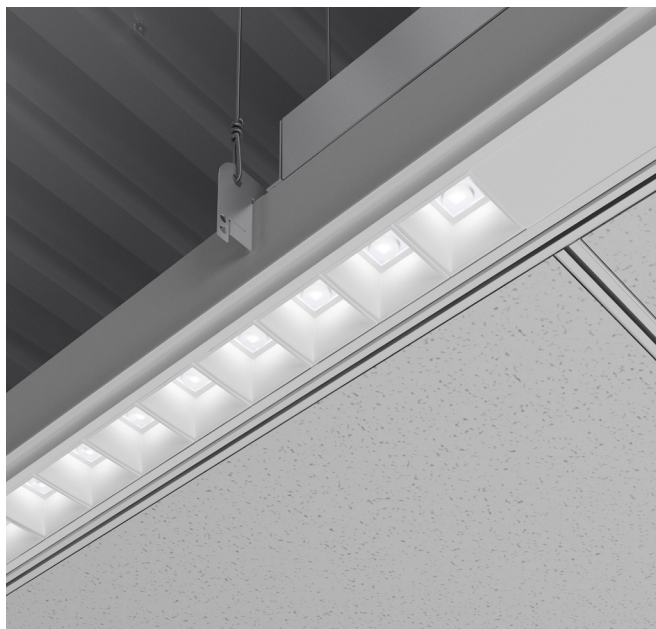

WARNINGS:


- Do not assemble continuous run on the ground and lift into place. Joints will distort and not create a tight fit. Joining hardware will have to be purchased and replaced.
- Risk of electrical shock or fire, disconnect power during installation or servicing. Read all instructions completely before starting installation. Install and wire in accordance to all national and local codes by a certified electrician. Fixture may be sharp, handle with care. Let fixture cool before maintenance.

ADVERTENCIA:

Riesgo de descarga eléctrica o un incendio, desconecte la alimentación durante la instalación o servicio. Leer todas las instrucciones completas antes de empezar la instalación. Instalar y cablear en acuerdo a las reglas nacionales y códigos locales por un electricista certificado. El accesorio puede estar agudo, agarre con cuidado deje que el accesorio. Enfriar antes de mantenimiento.


AVERTISSEMENTS:

- Risque d'électrocution ou d'incendie. Déconnectez l'alimentation durant l'installation ou la maintenance. Lisez attentivement toutes les instructions avant de commencer toute installation. Faites installer et câbler selon les normes Nationales et Locales par un électricien certifié. Les installations peuvent être coupantes, à manipuler avec précaution. Laissez refroidir les installations avant une opération de maintenance.

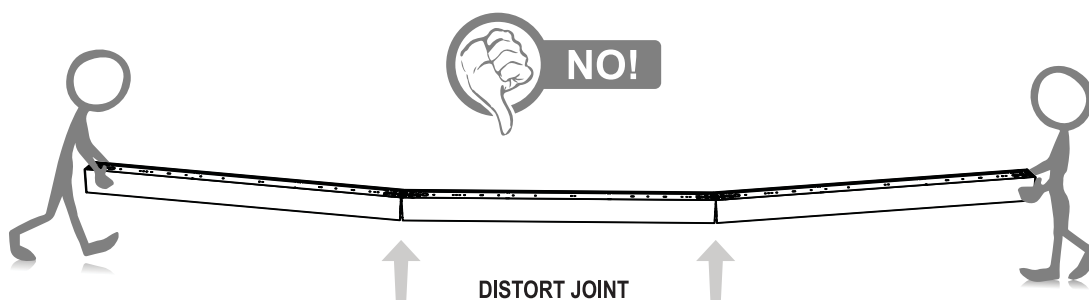


INSTALLATION AND MOUNTING DETAILS


Compatible Ceiling Grid Types

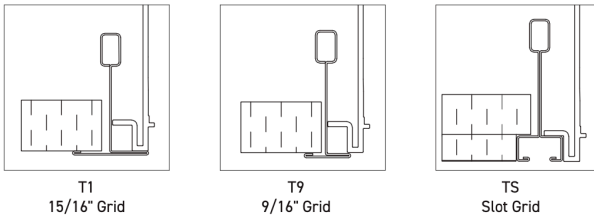



Ceiling Grid Details

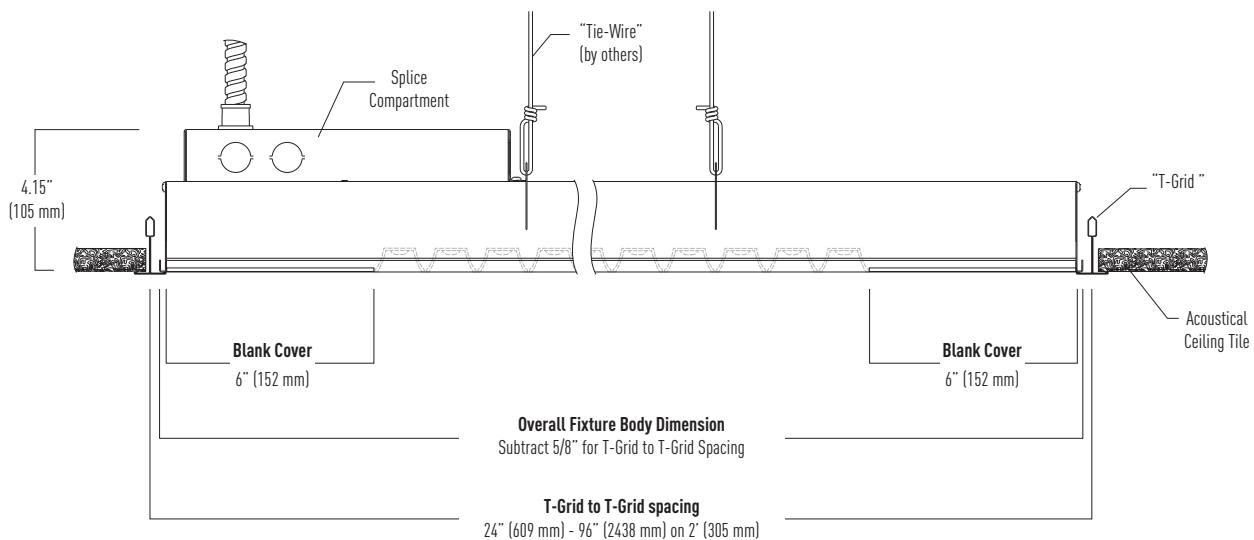

ROW LAYOUT DETAILS

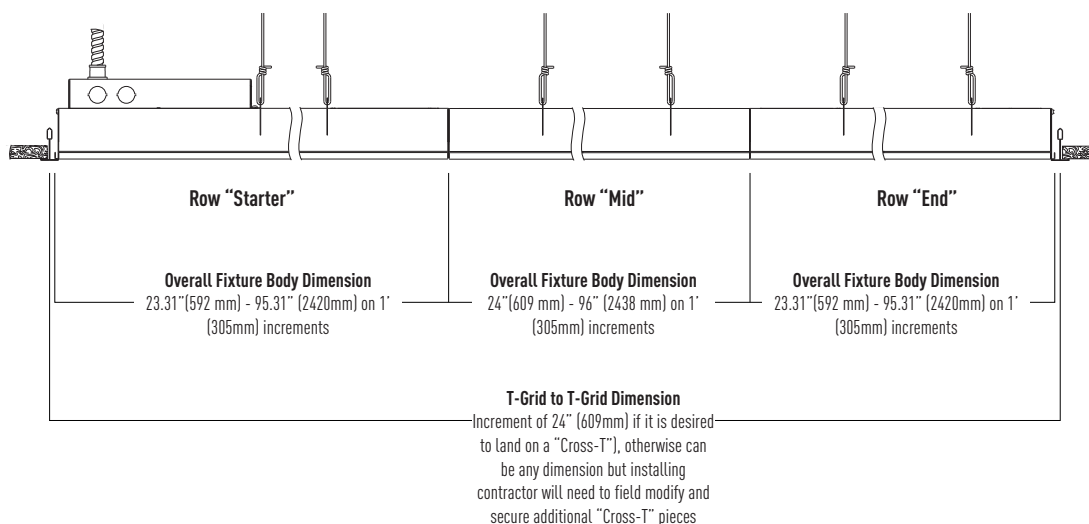


INSTALLING AN INDIVIDUAL OR ROW- STARTER LUMINAIRE

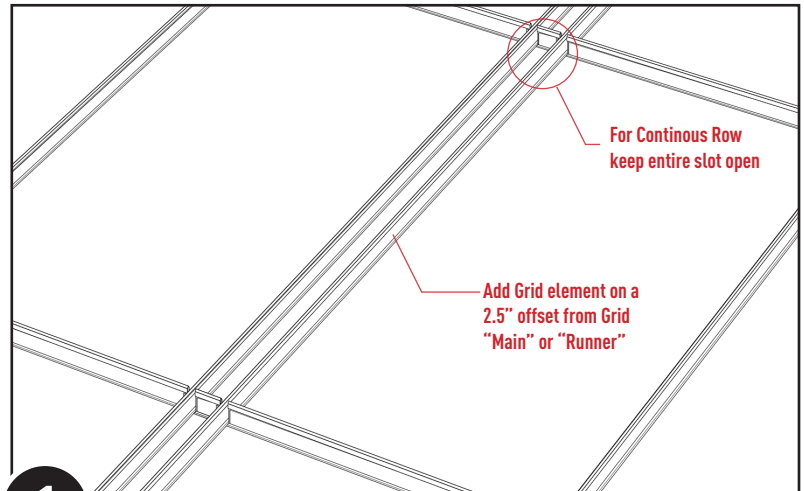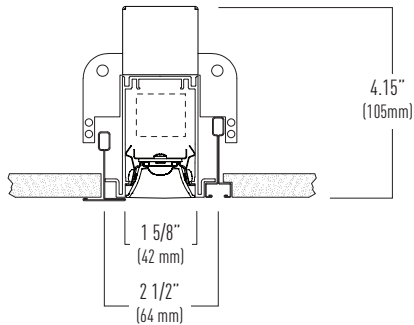


1

Ceiling Tradesman to Prepare Ceiling Grid As Shown

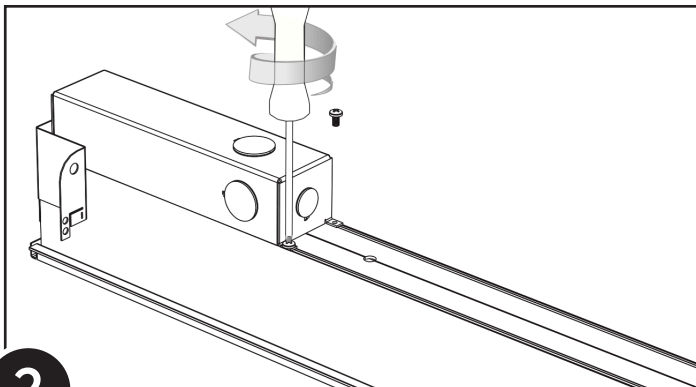


2

Remove Splice Box With Philips Head Screw Driver

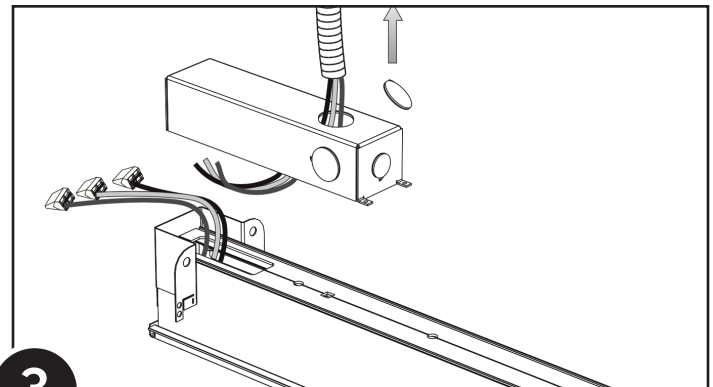


3

Remove 7/8" Knock-Out and Feed Line and Low Voltage
Leads Through Opening

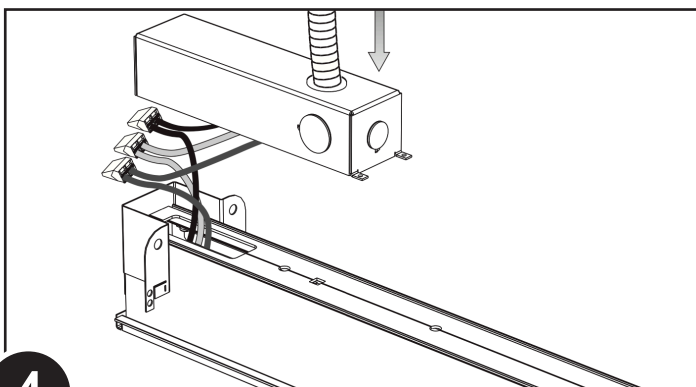


4

Connect Whip and Make Line and Low Voltage Wire
Connections

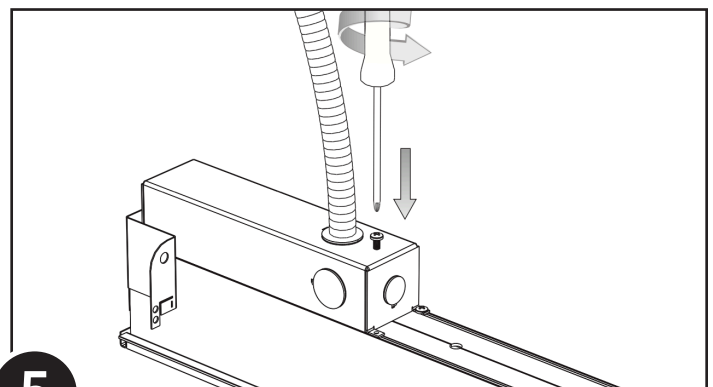


5

Re-Attach Splice Box

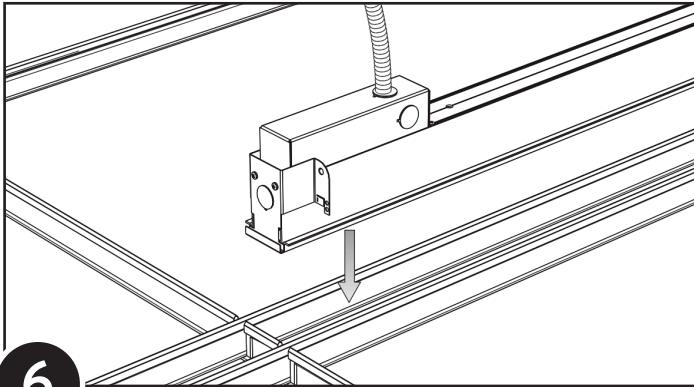

6


Rest Fixture Into Prepared Grid Aperture

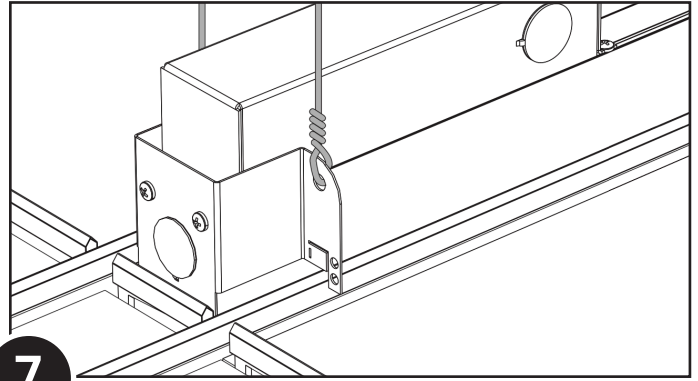

7


Secure Fixture To Structure with Tie Wire (By Others)

INSTALLING AN INDIVIDUAL OR ROW- STARTER LUMINAIRE

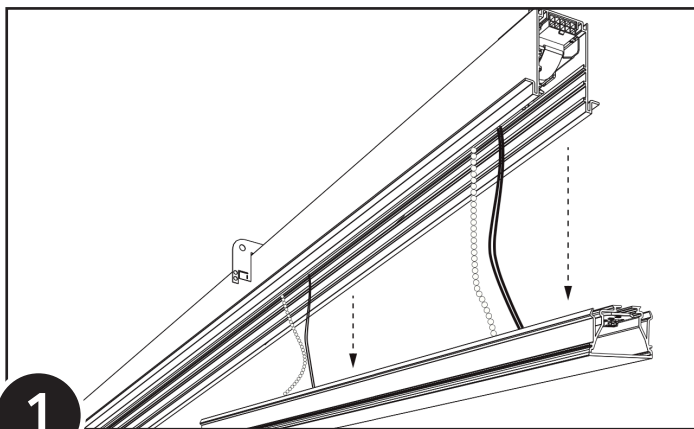


1

For Continuous Rows Repeat Steps 1-7 For First Fixture in Row, Then Remove Lens or Baffle From Fixtures to Be Joined

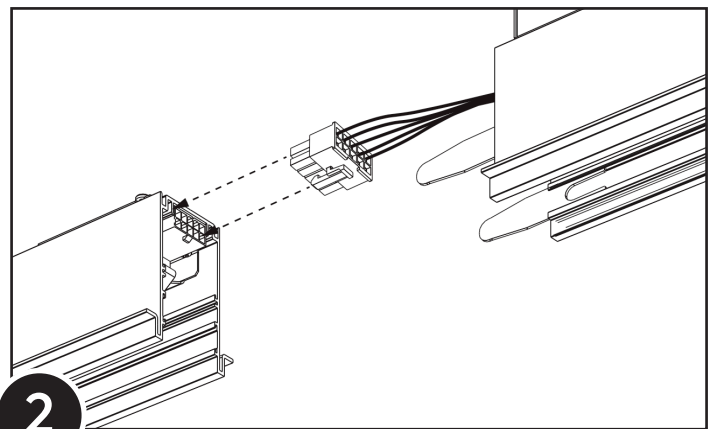


2

Locate Male Quick Connect Harness

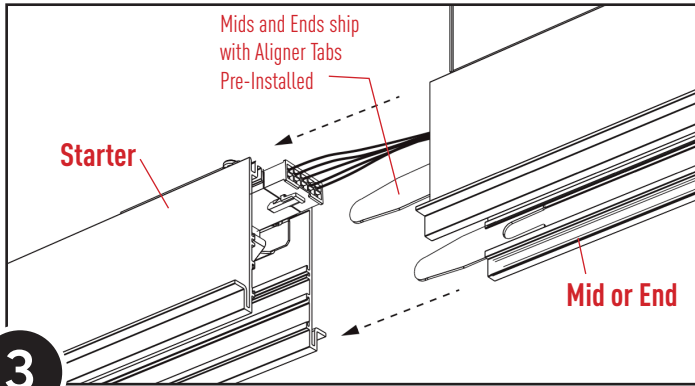


3

Make Quick Connect Wire Connection and Align "Aligners" Tabs

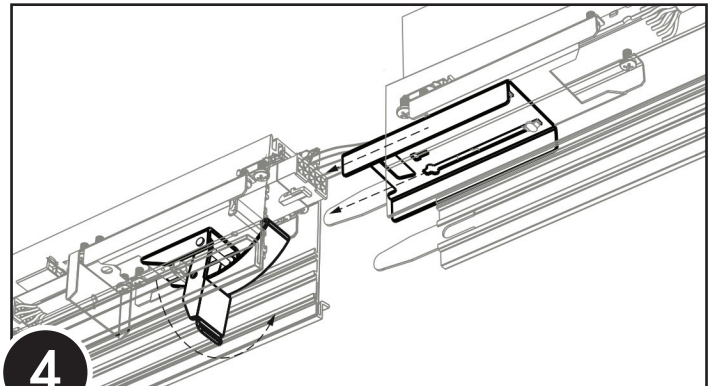


4

Locate Joining Buckle On First Fixture, And Then Slide Out Joining Bracket On Second Fixture

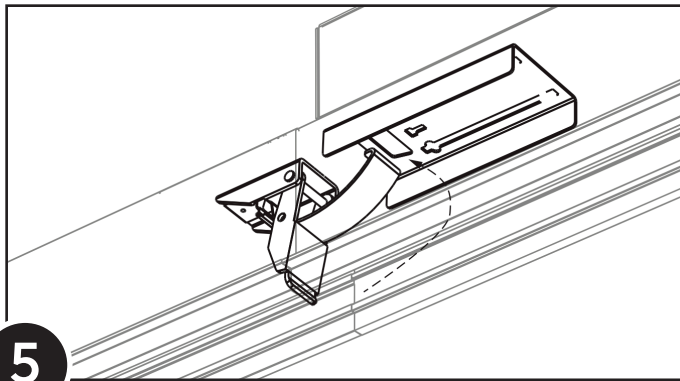


5

Join Fixtures and Rotate Joining Buckle Into Bracket Opening

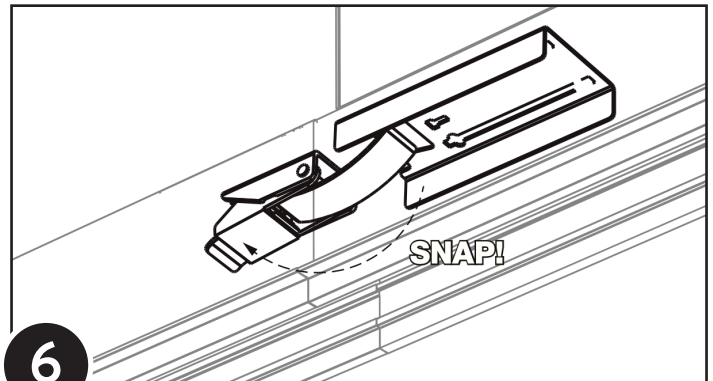

6

Snap Buckle For Final Fixture Joining

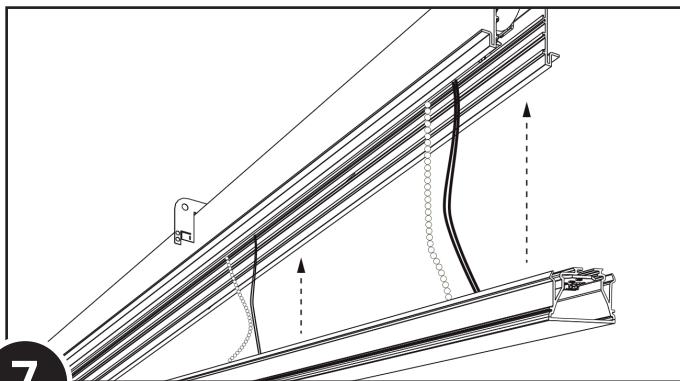

7

Snap Lens or Baffle Assembly Into, Place, And Energize Luminaire.... you are all done! Great Job!