

WARNINGS:


- Do not assemble continuous run on the ground and lift into place. Joints will distort and not create a tight fit. Joining hardware will have to be purchased and replaced.
- Risk of electrical shock or fire, disconnect power during installation or servicing. Read all instructions completely before starting installation. Install and wire in accordance to all national and local codes by a certified electrician. Fixture may be sharp, handle with care. Let fixture cool before maintenance.

AVERTISSEMENTS

- Risque d'électrocution ou d'incendie. Déconnectez l'alimentation durant l'installation ou la maintenance. Lisez attentivement toutes les instructions avant de commencer toute installation. Faites installer et câbler selon les normes Nationales et Locales par un électricien certifié. Les installations peuvent être coupantes, à manipuler avec précaution. Laissez refroidir les installations avant une opération de maintenance.


ADVERTENCIA

- Riesgo de descarga eléctrica o un incendio, desconecte la alimentación durante la instalación o servicio. Leer todas las instrucciones completas antes de empezar la instalación. Instalar y cablear en acuerdo a las reglas nacionales y códigos locales por un electricista certificado. El accesorio puede estar agudo, agarre con cuidado deje que el accesorio. Enfriar antes de mantenimiento.

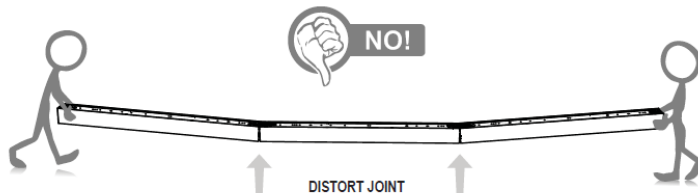


Luminaire Types


Individual

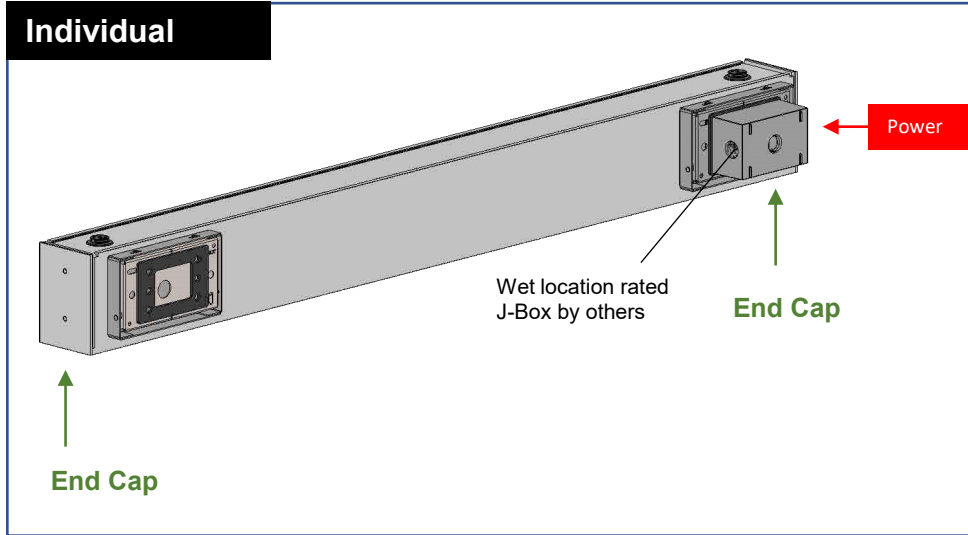


Row Mid

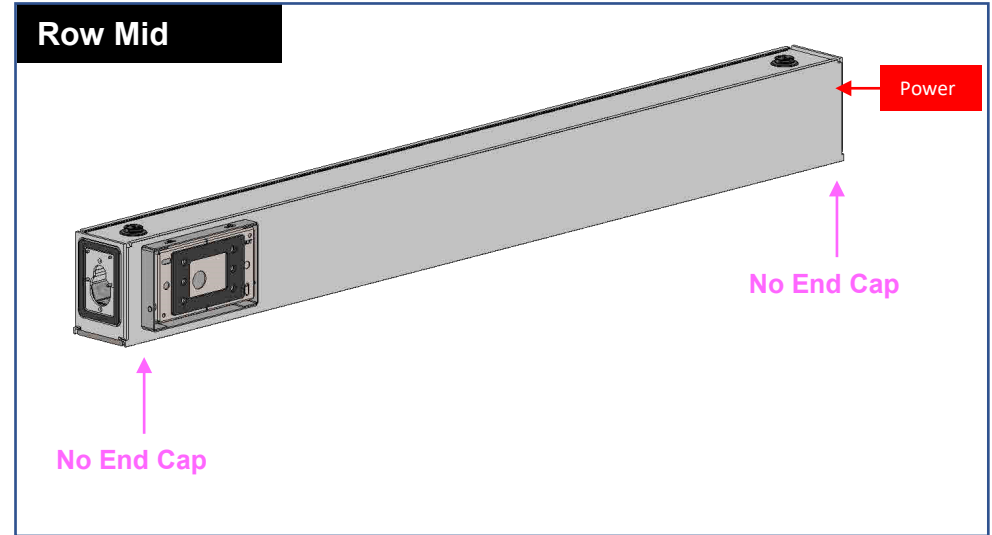


Row Starter

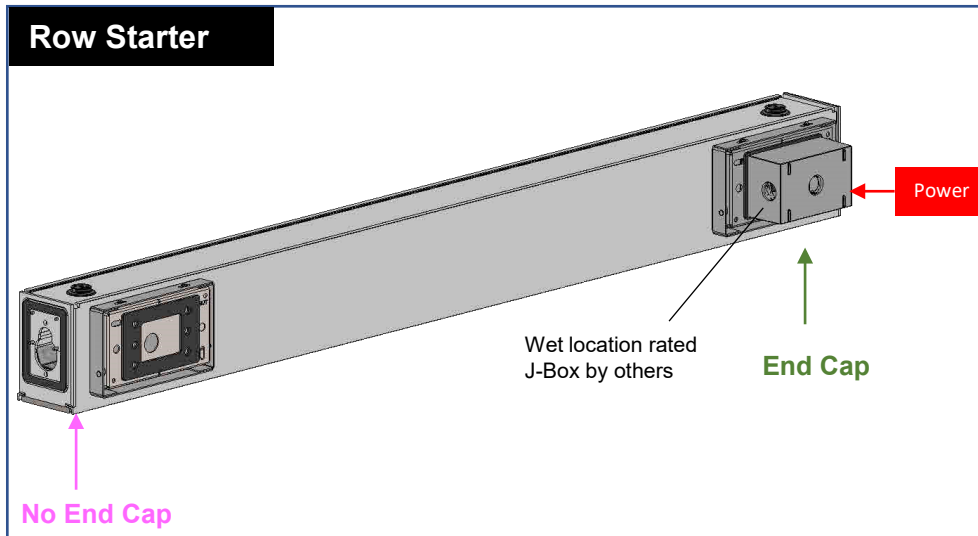


Row End

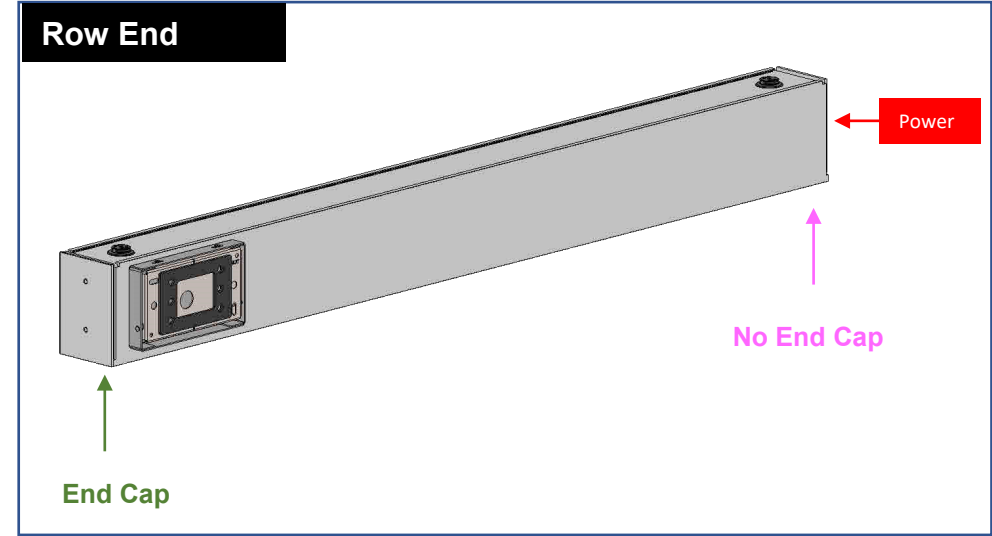


Step 1 – rough-in structure and power

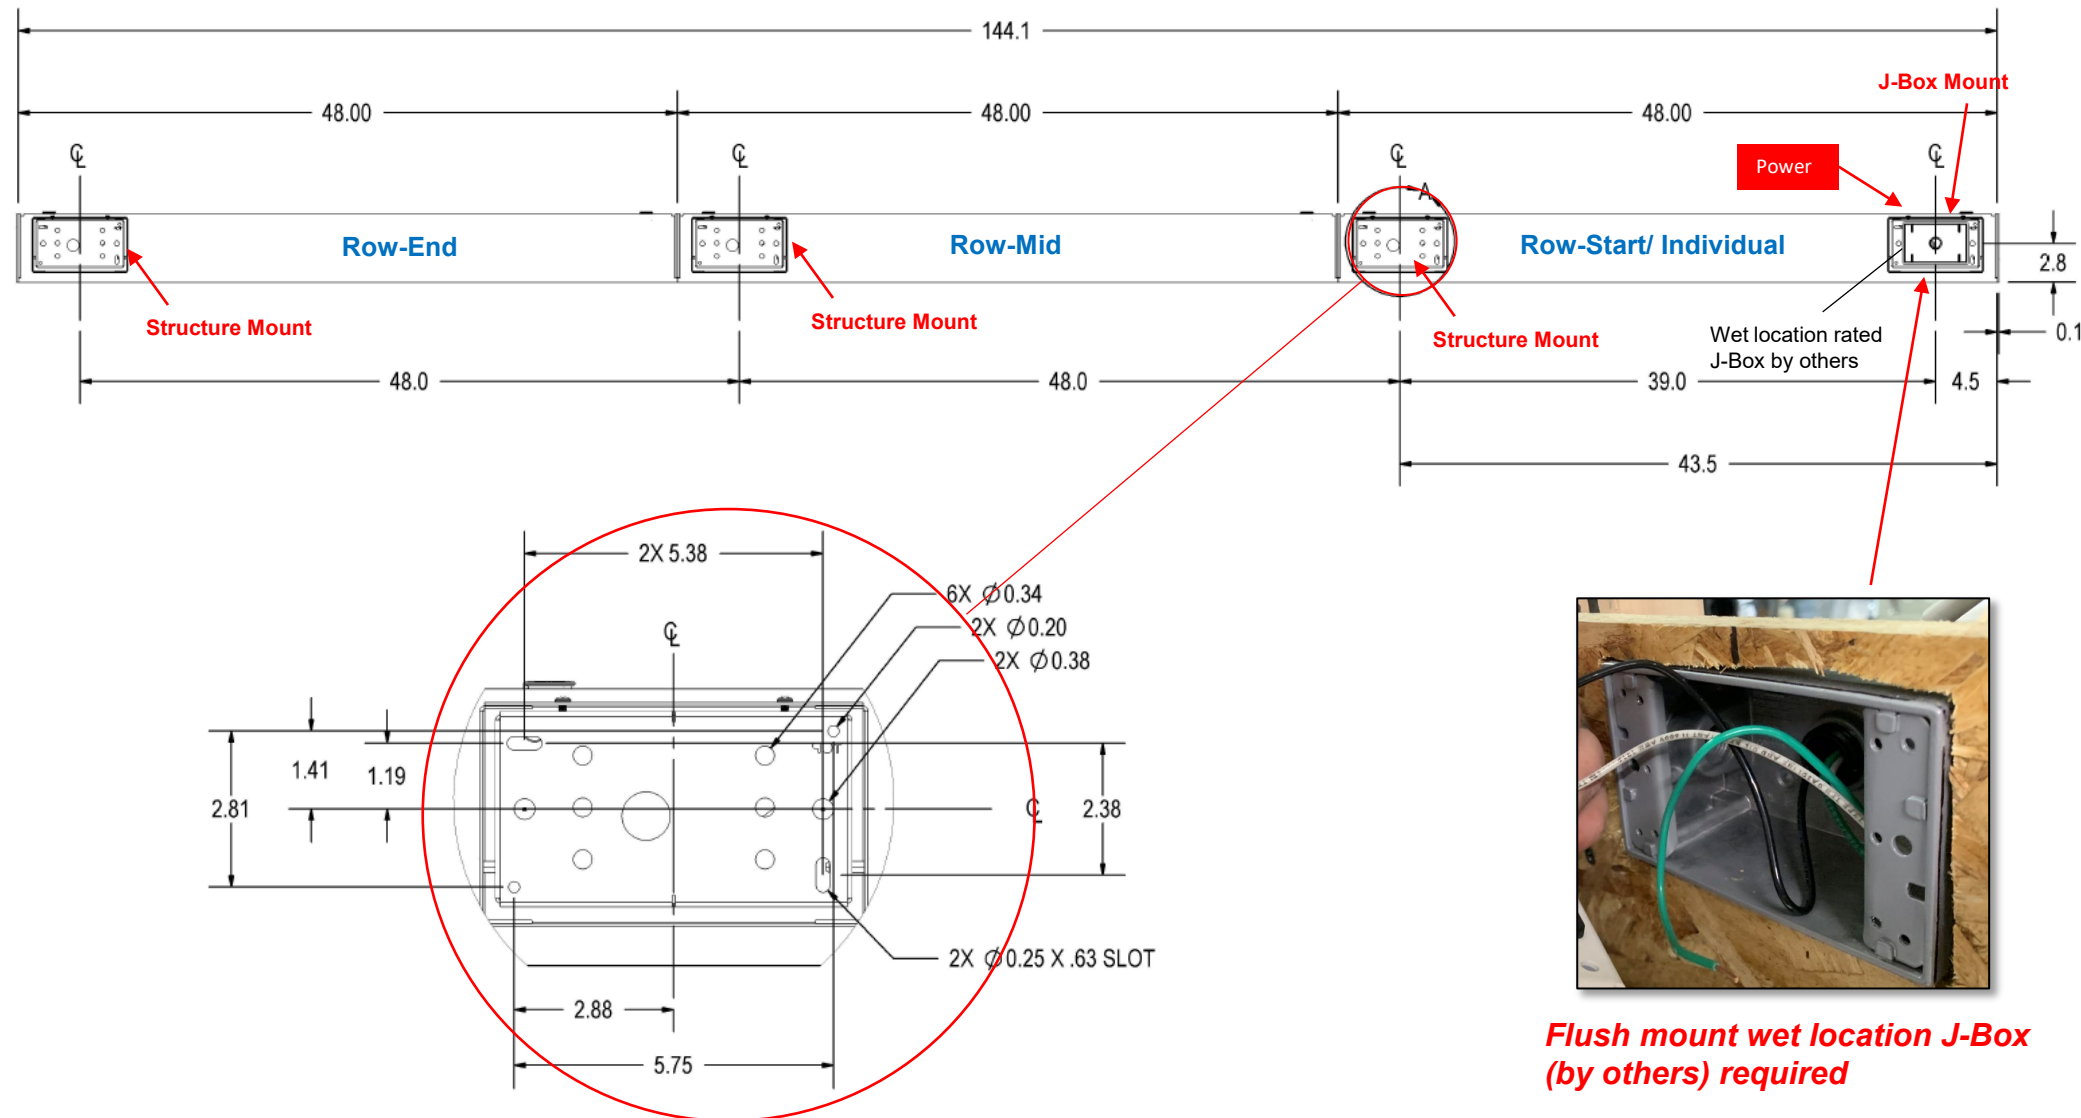

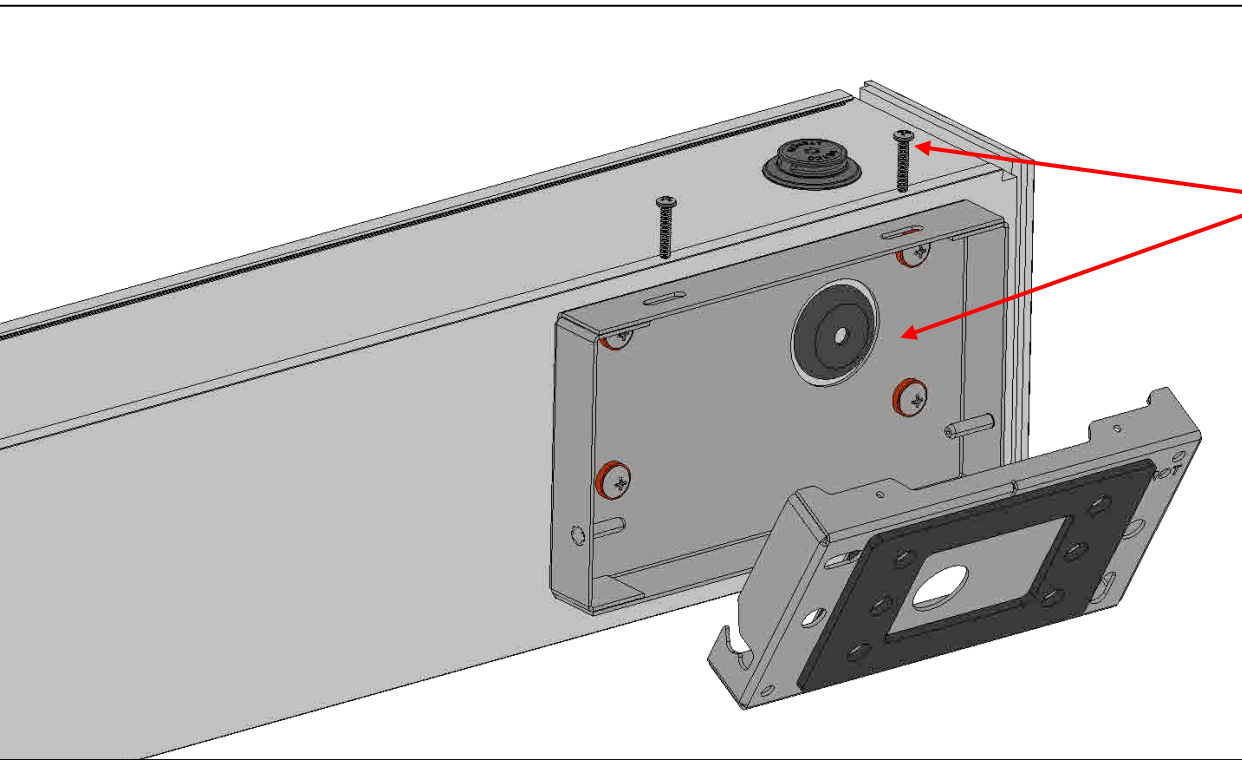


J-Box mounting screws located between mounting plates, remove two screws to access

Step 2- Remove both power side and non-power side wall mounting plates and locate J-Box mounting screws

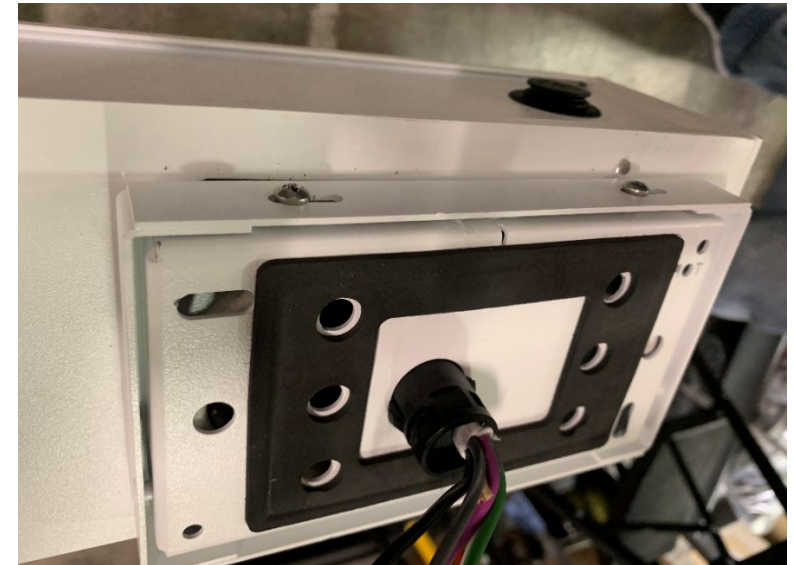




Step 3- For power bracket mount, Make sure wet location rated J-Box is installed flush to the mounting surface prior to installation

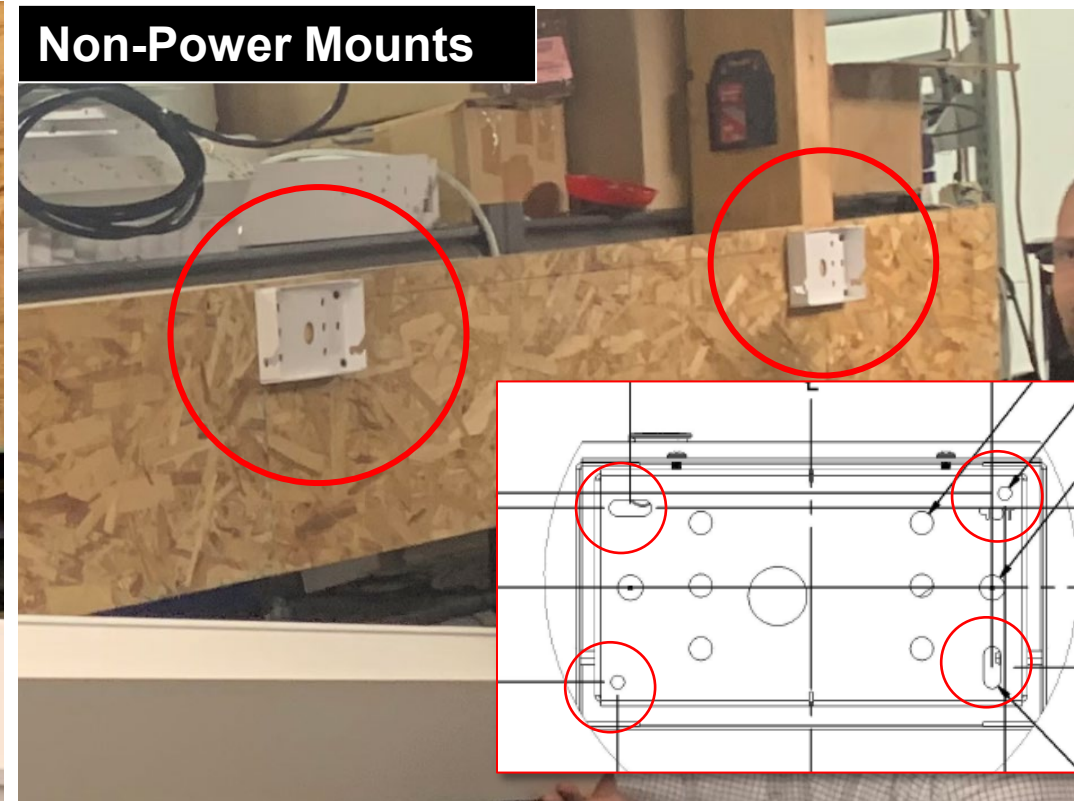

Step 4- Install non-power mounting brackets at appropriate locations



Step 5- Make wire connections (certified electrician)

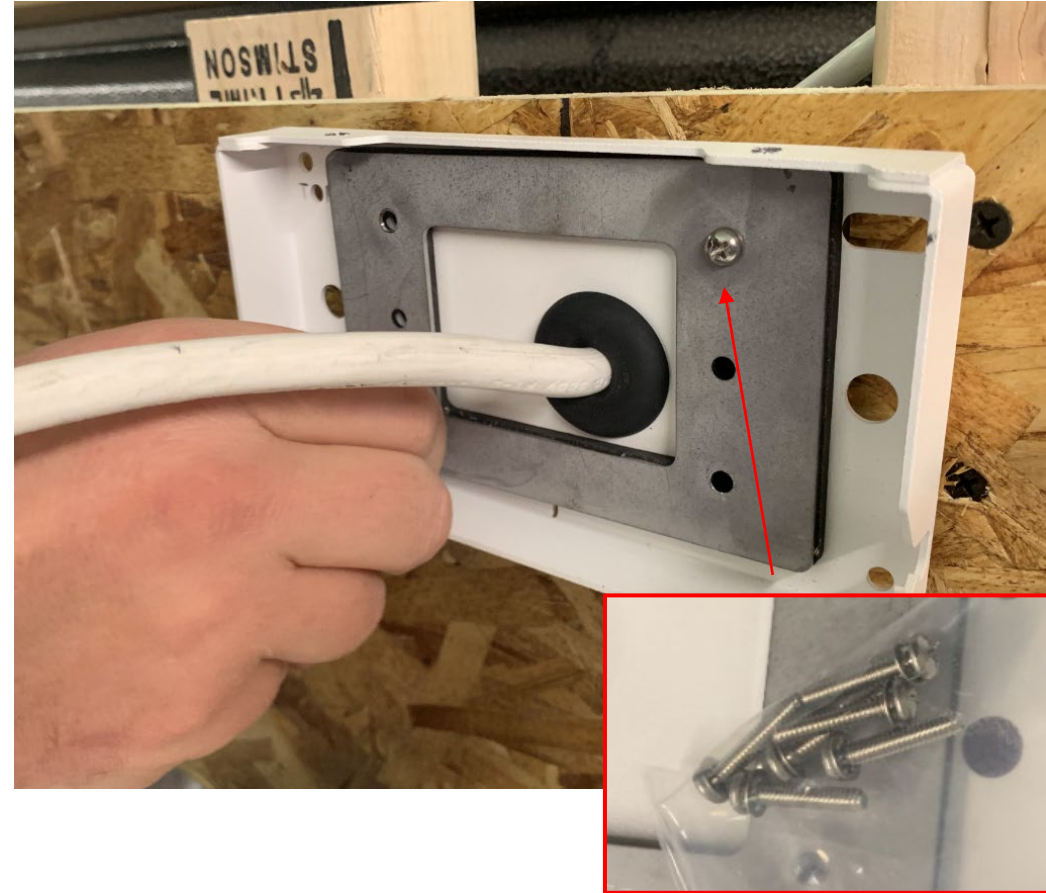


Step 6- Mount power side bracket directly to pre-installed wet location J-Box



*****Fixtures require two person installation*****


Step 7- with two people, carefully engage pins to slots on both the power and non-power side mounting brackets

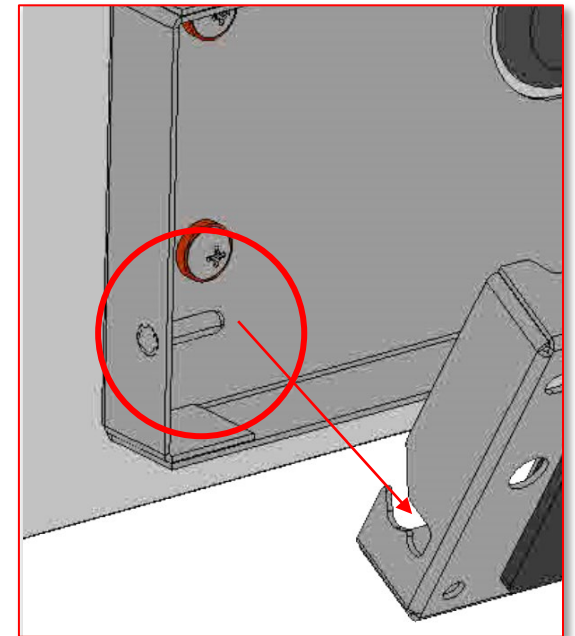




Step 8- On power side, Carefully push excess cord into bracket enclosure on power bracket, rotate fixture into place and screw to mounting plate for both power and non-power brackets.





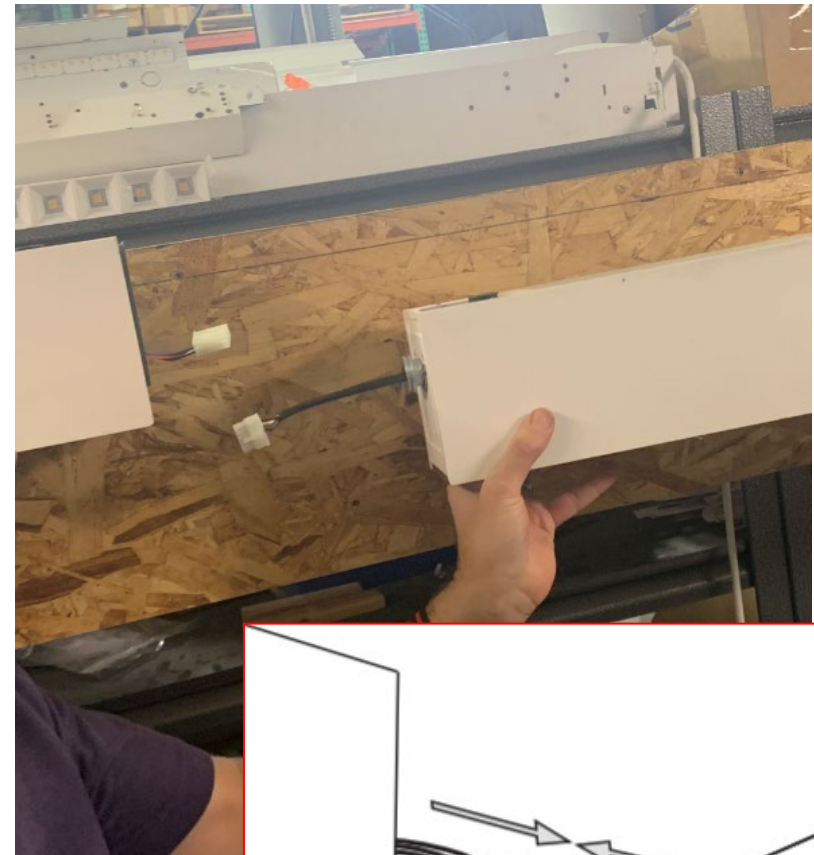


Step 9- For **Row-Mid** or **Row-End** fixture, first make quick wire connection as shown and push molded connector into power side of fixture.

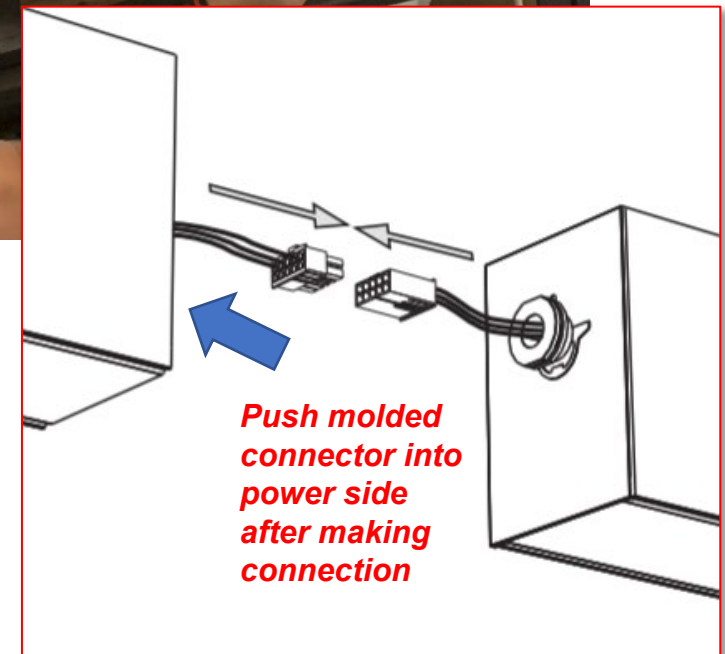



Step 10- To join or engage fixtures, align the metal disc feature into the key slot feature, then push up with maximum force to engage internal spring, and fixtures will snap into place creating a weather tight seal.

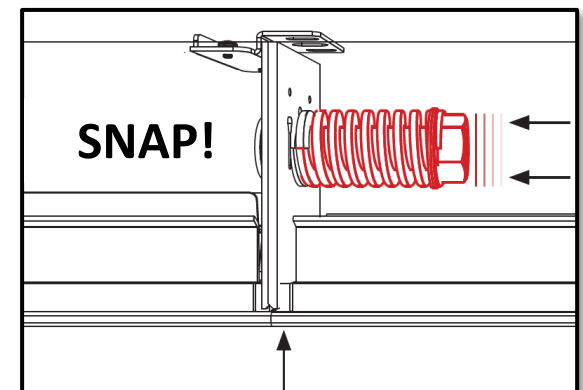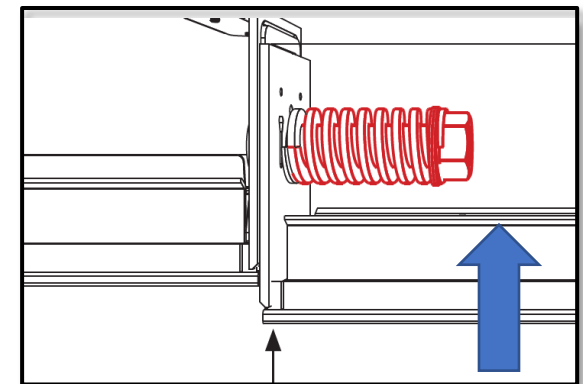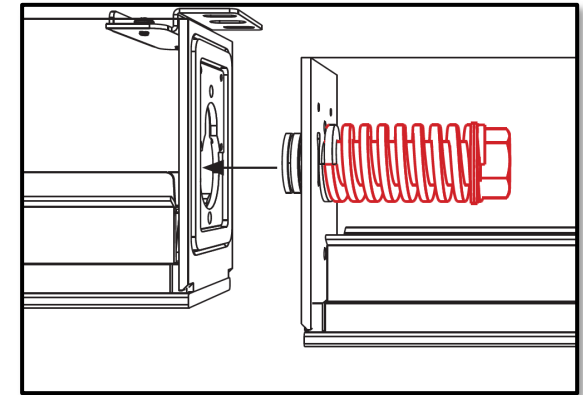



Step 11- Installation complete! You may now energize the RXT wall mount luminaire!