

### Bounce Recessed BRM Series

Metal top reflector pre-installed at the factory



### Bounce Recessed BRT Series

Top tile by others, coordinate with architect and tile manufacturer

#### WARNINGS:

- Risk of electrical shock or fire, disconnect power during installation or servicing. Read all instructions completely before starting installation. Install and wire in accordance to all national and local codes by a certified electrician. Fixture may be sharp, handle with care. Let fixture cool before maintenance.

#### AVERTISSEMENTS


- Risque d'électrocution ou d'incendie. Déconnectez l'alimentation durant l'installation ou la maintenance. Lisez attentivement toutes les instructions avant de commencer toute installation. Faites installer et câbler selon les normes Nationales et Locales par un électricien certifié. Les installations peuvent être coupantes, à manipuler avec précaution. Laissez refroidir les installations avant une opération de maintenance.

#### ADVERTENCIA


Riesgo de descarga eléctrica o un incendio, desconecte la alimentación durante la instalación o servicio. Leer todas las instrucciones completas antes de empezar la instalación. Instalar y cablear en acuerdo a las reglas nacionales y códigos locales por un electricista certificado. El accesorio puede estar agudo, agarre con cuidado de que el accesorio. Enfriar antes de mantenimiento.

### BRM Series

Sizes and Dimensions

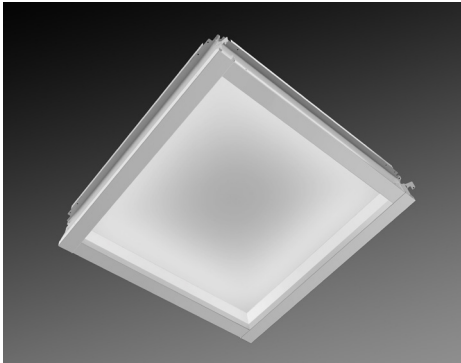

**2'x2'**



BRM2-22  
BRM4-22



**2'x4'**



BRM2-24  
BRM4-24

2 ROWS (SIDES) OF ILLUMINATED

4 ROWS (SIDES) OF ILLUMINATED

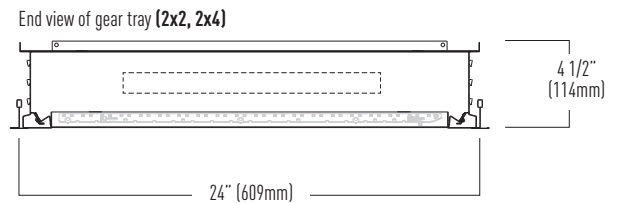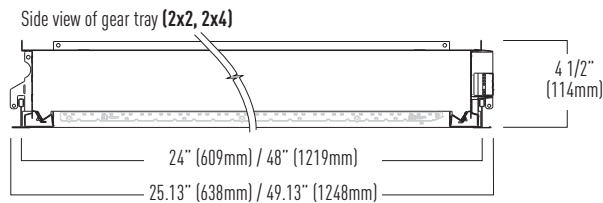


### BRT Series

Sizes and Dimensions




**2'x2'**




BRT2-22  
BRT4-22

**2'x4'**







BRT2-24  
BRT4-24

**4'x4'**




BRT2-44  
BRT4-44

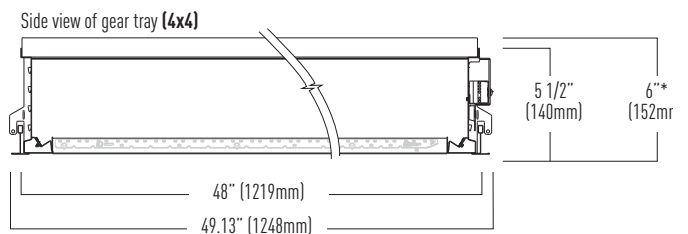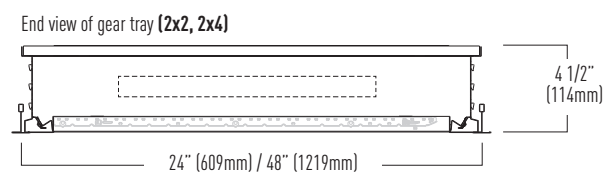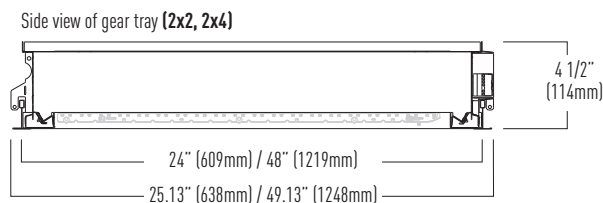

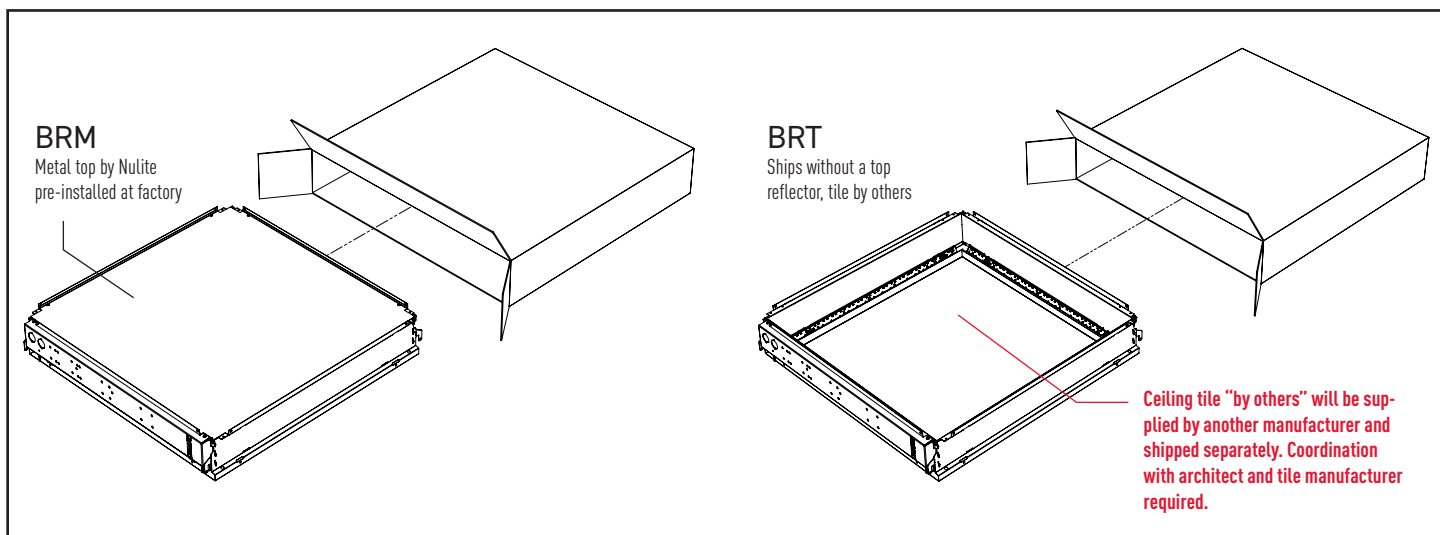


## 1 Remove Fixture from Packaging

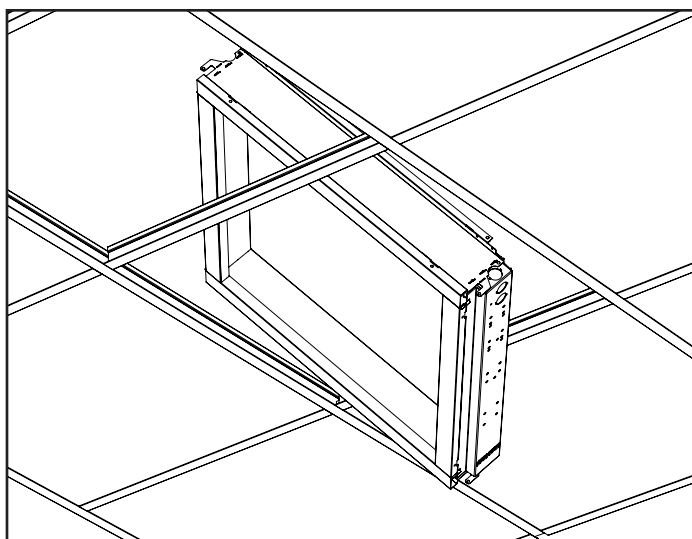

## 2 From Below, Lift fixture up through ceiling Grid


### BR\_4

Illuminated from 4 sides, grid orientation not critical

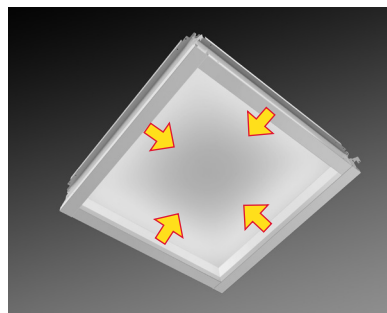


### BR\_2


Illuminated from 2 sides, grid orientation critical

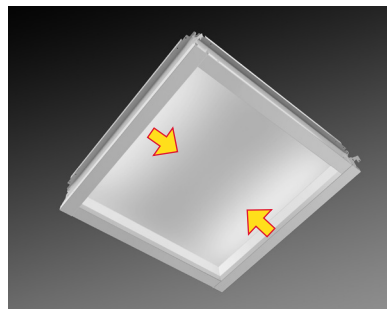


Before installing the BR\_2 series makes sure the sides with LEDs are properly aligned from fixture to fixture.

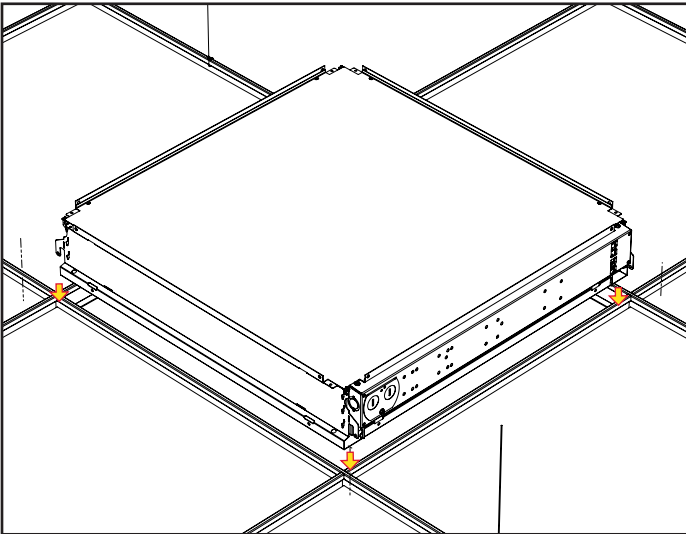


**3** Lay fixture into grid aperture

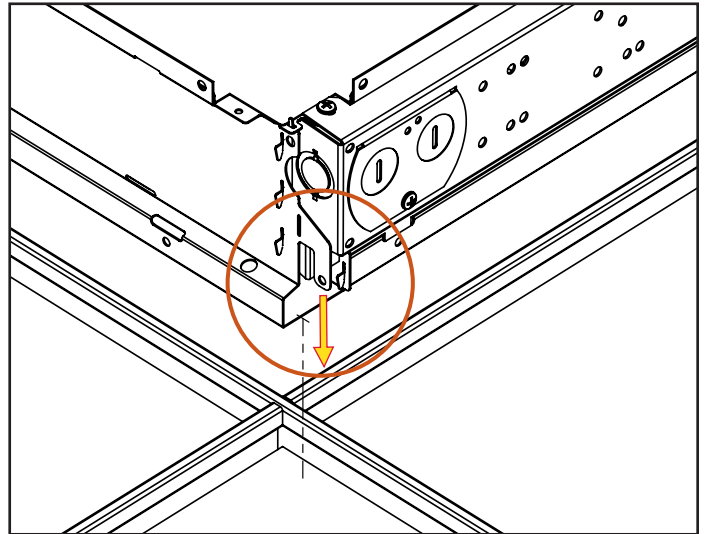


**4** Make Sure Tabs are properly aligned

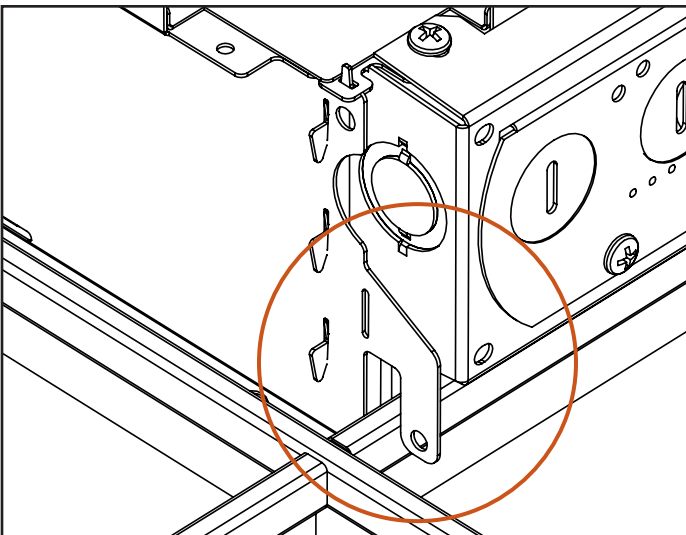


**5** Tabs should rest on grid as shown

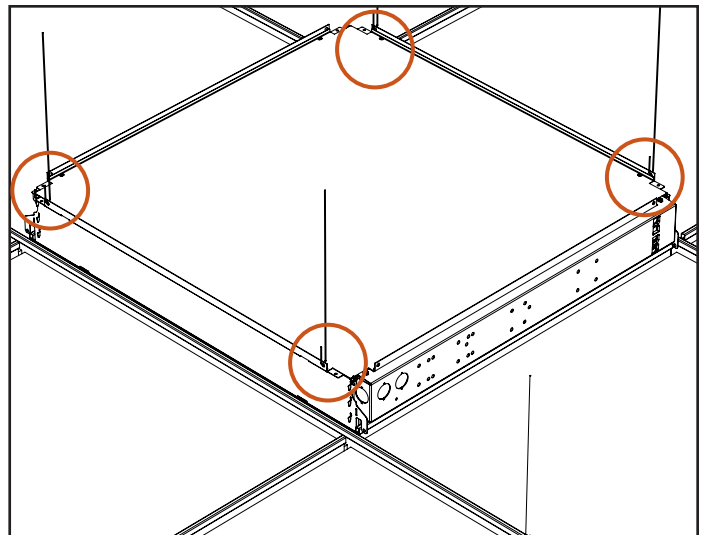


**6** Secure fixture to structure with tie-wire on all 4 corners  
*Tie wire by others*

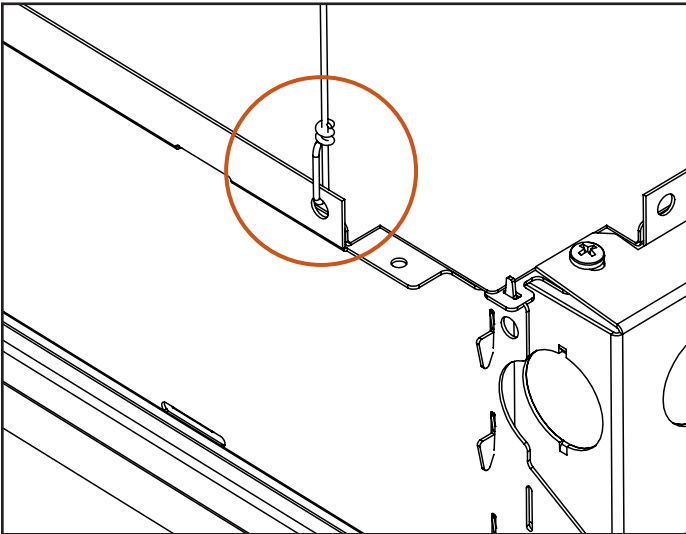


**7** Secure fixture to structure with tie-wire on a all 4 corners (Detail)

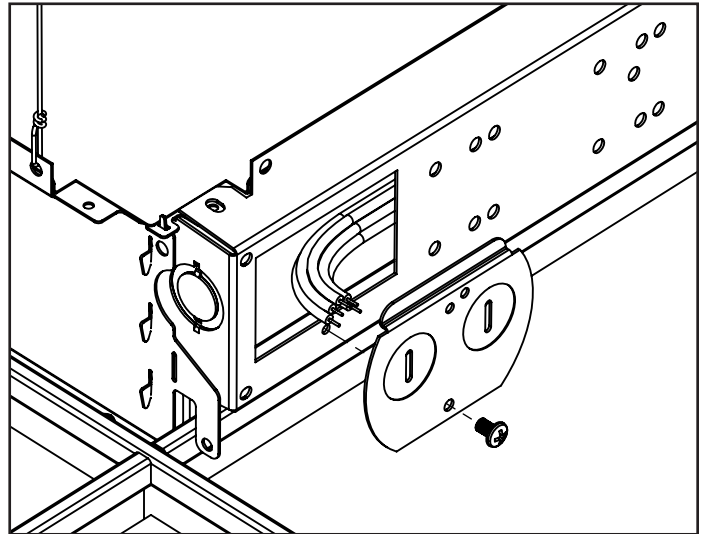


**8** To make power connection remove screw and remove access plate and pull out wires

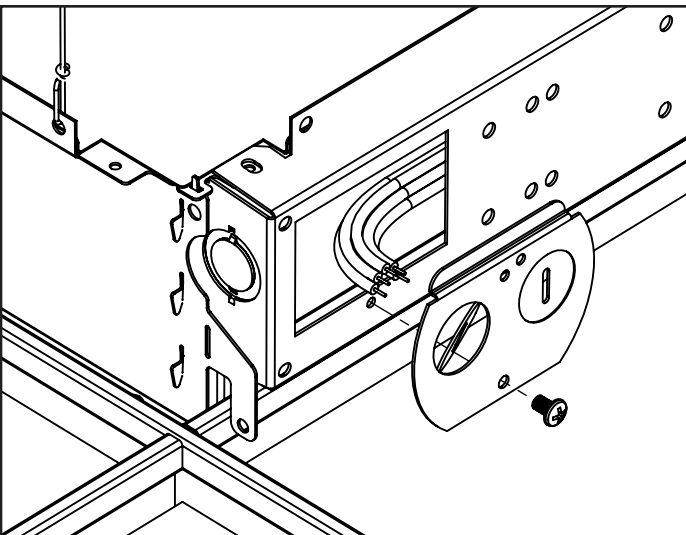


**9** Remove 7/8" KO

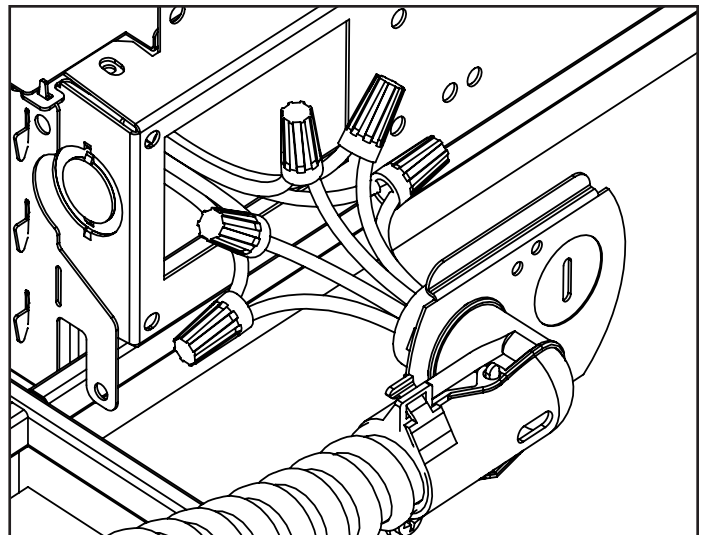


**10** Attach flexible conduit to access plate and make wire connections

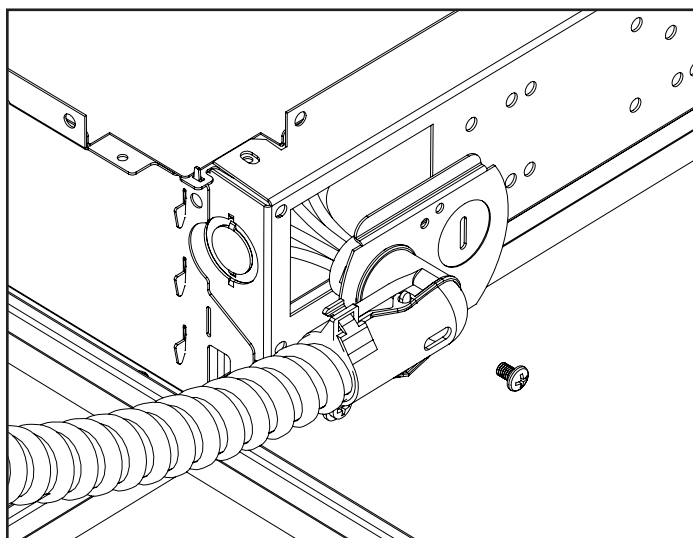

**12** Push splice back into wire cavity and re-attach access plate

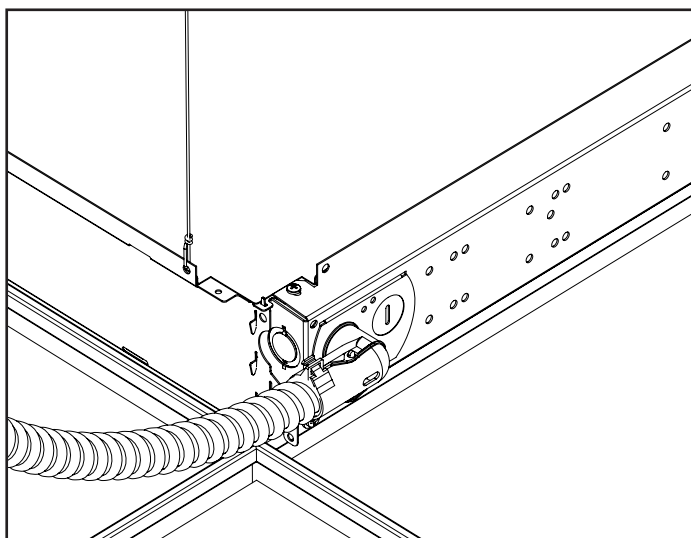

**11** Installation complete, energize luminaire

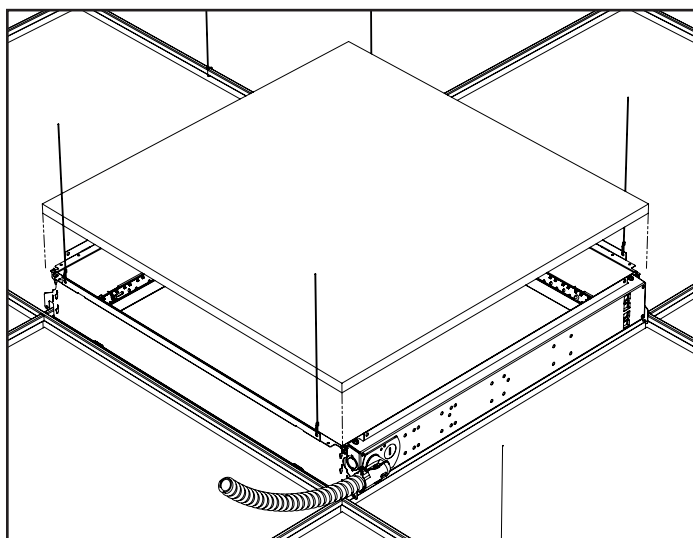

**12** BRT only, place tile on top of the luminaire