

Length	Wattage
24"	14T5, 24T5HO, 17T8
36"	21T5, 39T5HO, 25T8
48"	28T5, 54T5HO, 32T8
72"	21T5-6, 39T5HO-6, 25T8-6
96"	28T5-8, 54T5HO-8, 32T8-8, 59T8

Project Name:

Type:

Date:

Catalog #:

Description:

The Nulite I-12 is an industrial grade luminaire which is ideal for retail, commercial and industrial applications. The I-12 may be surface mounted or suspended, individually or in continuous row.

Specifications:

Construction: Die formed, 22 gauge, cold rolled steel designed for high strength. The housing finish is white baked enamel. End caps snap in for easy installation and maintenance. In addition, the end cap can be used as a joint aligner for continuous row mounting.

Reflector / Ballast: Reflector is finished with a minimum of 82% reflectance white baked enamel. Optional specular Miro®4 reflector. Standard electronic, Class P, ballast. Universal (UNV) voltage ballast is from 120 to 277V.

Lamping: 2 or 3 lamp cross-section T5, T5HO or T8. Nominal 6' and 8' housings are tandem lamp configurations except for 59W. Luminaire can be ordered with lamps, consult factory.

Mounting: Luminaires may be surface mounted or suspended, individually or in continuous row.

Labels: UL / cUL listed. Damp location is optional.

Ordering Information

Sample: I-12-232T8-UNV-HEISH-3C

Series	Lamp	Wattage	Voltage	Ballast	Options	Mounting
I-12						
	1	14T5	UNV	T8 Options	Ballast Factor	QS ² Quick Ship 5 day (50 max) / 10 day (100 max)
	2	24T5HO	120	IS (Standard) Instant Start	N Normal (Standard)	
	3	17T8	277	PS Program Start	L Low	EM ³ Emergency Battery Pack
		21T5	347 ¹	HEIS High Efficiency Instant Start	H High	DL Damp Location
		39T5HO	480 ¹	HEPS High Efficiency Program Start		WG Wireguard
		25T8				CEP Closed Endplates
		28T5				AP Aperture Reflector (10% Uplight)
		54T5HO				MLS Multi-Level Switching
		32T8				M4 Miro®4 Reflector
		21T5-6		T5/T5HO	Ballast Factor	
		39T5HO-6		PS (Standard) Program Start	N Normal	
		25T8-6		HEPS ¹ High Efficiency Program Start		
		28T5-8				
		54T5HO-8				
		32T8-8				
		59T8 (F96T8)				
				All Lamp Dimming Options		
				DIM ¹ Dimming		
				SD ¹ Step Dimming		
						QW Quick Through Wiring for Continuous Row Applications
						GLR Fusing

Notes:


1. Consult factory.

2. Highlighted options are available for Quick Ship. Order must be marked "QS". Order quantities of (1 - 50) will ship in 5 day; order quantities of (51 - 100) will ship in 10 days. Consult factory for Quick Ship policies.

3. Specific voltage must be ordered for this option. Consult factory for nom. 2' and 3' units.

Specifications and dimensions are subject to change without notification. Specification sheets on our website supersede all other versions. 2013 Rev. D
Nulite reserves the right to bulk package any order.

Industrial Options

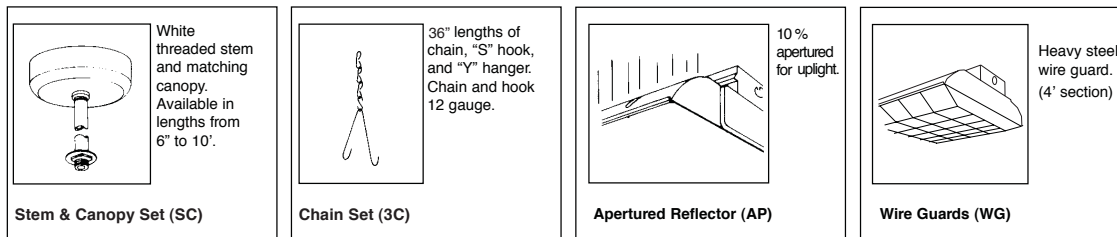

Plan view of KOs on back of channel

All housings have 7/8" KOs on both ends as well as on the back of the channel. In addition, each channel has eyelets and other holes for mounting by various means.



Specifications and dimensions are subject to change without notification.