



Project Name:	
Type:	Date:
Catalog #:	

### Description:

The Nulite GID series is a nominal 2'x2' or 4'x4' recessed grid luminaire. This luminaire provides a soft ambient illumination for an aesthetically pleasing, glare-free environment.

### Specifications:


**Construction:** Housing is die formed cold rolled steel. Drop down shielding is die formed of heavy gauge aluminum allowing for easy access to lamp compartment. Electrostatically applied powder coat low-gloss white paint finish after fabrication. Optional perforated metal shielding with opal acrylic inlay diffuser.

**Reflector / Ballast:** Pan is formed and powder coated with high quality textured white paint. Standard electronic, Class P, ballast. Universal (UNV) voltage ballast is from 120 to 277V.

**Lamping:** 4 lamp Long Twin Tube (FT); 4 or 8 lamp T5 or T5HO; 4 lamp T8. Luminaire can be ordered with lamps, consult factory.

**Mounting:** Grid for Lay-in T-bar ceiling; Non-IC rated.

**Labels:** UL / cUL listed. Damp location is optional.

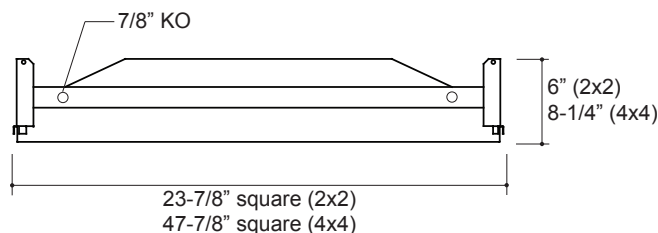

### Ordering Information

Sample: GID-2-424T5HO-UNV-PSN-PERF

Series	Lamp	Wattage	Voltage	Ballast		Options
Grid (2x2) GID-2  (4x4) GID-4	4 8 <sup>1</sup>	(2x2)	UNV  120  277  347 <sup>2</sup>	T5/T5HO/FT	Ballast Factor	PERF Perforated Shielding  EM <sup>3</sup> Emergency Battery  MLS Multi-level Switching (8-lamp unit only)  DL Damp Location  GLR Fusing  FLEX3 6' of Flex, 3-wire  FLEX4 6' of Flex, 4-wire (Only available with MLS option)
		36FT 36W/2G11		PS <sup>(Standard)</sup> Program Start	N Normal	
		55FT 55W/2G11		HEPS <sup>2</sup> High Efficiency Program Start		
		14T5		All Lamp Dimming Options		
		24T5HO		DIM <sup>2</sup> Dimming SD <sup>2</sup> Step Dimming		
		(4x4)				
		28T5				
		54T5HO				
		25T8				

**Notes:**

1. 8-lamp option not available in 2x2 and only available for T5 and T5HO in 4x4.
2. Consult factory.
3. Specific voltage must be ordered for this option.