



Project Name:	
Type:	Date:
Catalog #:	

Description:

The Nulite SA narrow strip is a specification grade luminaire with multiple reflector options. This luminaire is ideal for commercial, retail and industrial applications.

Specifications:


Construction: Die formed 20 gauge cold rolled steel with 16 gauge cold rolled steel end caps and 7/8" KOs for easy wiring. The housing is finished in high reflectance white baked polyester powder coat paint after fabrication. Optional aluminum housing.

Reflector / Ballast: Reflector / ballast cover is finished with high reflectance white baked polyester powder coat paint after fabrication. Consult factory for custom reflectors. Standard electronic, Class P, ballast. Universal (UNV) voltage ballast is from 120 to 277V.

Lamping: 1 lamp cross-section T8. Nominal 6' or 8' housing is a tandem lamp configuration. Luminaire can be ordered with lamps, consult factory.

Mounting: Surface.

Labels: UL / cUL listed. Damp location is optional.

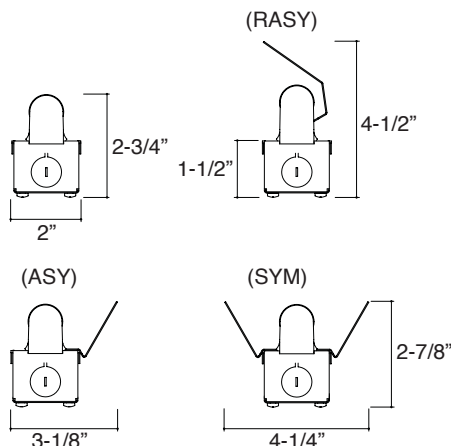

Length	Wattage
24"	17T8
36"	25T8
48"	32T8
72"	25T8-6
96"	32T8-8

Ordering Information

Sample: SA-132T8-UNV-ISH-SYM

Series	Lamp	Wattage	Voltage	Ballast	Options
SA	1				
		17T8	UNV	T8 Options	Ballast Factor
		25T8	120	IS (Standard) Instant Start	N Normal (Standard)
		32T8	277	PS Program Start	L Low
		25T8-6	347 ¹	HEIS High Efficiency Instant Start	H High
		32T8-8		HEPS High Efficiency Program Start	
				Dimming Options	
				DIM ¹ Dimming	WG ⁴ Wireguard
				SD ¹ Step Dimming	GLR Fusing
					QS ² Quick Ship 5 day (50 max) / 10 day (100 max)
					EM ³ Emergency Battery Pack
					AL Aluminum Housing
					DL Damp Location
					SYM Symmetrical Reflector
					ASY Asymmetrical Reflector
					RASY Reverse Asymmetrical Reflector
					QW Quick Through Wiring for Continuous Row Applications
					FRS Frosted Snap-on Lens

Notes:


- Consult factory.
- Highlighted options are available for Quick Ship. Order must be marked "QS". Order quantities of (1 - 50) will ship in 5 day; order quantities of (51 - 100) will ship in 10 days. Consult factory for Quick Ship policies.
- Emergency battery pack is not available for nominal 2' unit; consult factory for 3' unit. Specific voltage must be ordered for this option.
- Wireguard is not available with all reflectors, consult factory.

Specifications and dimensions are subject to change without notification. Specification sheets on our website supersede all other versions. 2013 Rev. C Nulite reserves the right to bulk package any order.



Photometric Curves





Cat.# SA-132T8...*
Initial lamp lumens - 2900

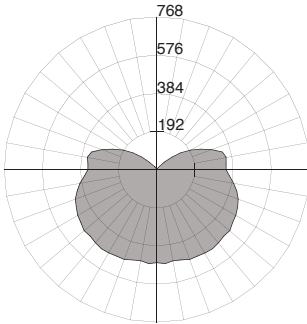


Cat.# SA-132T8...-ASY*
Initial lamp lumens - 2900

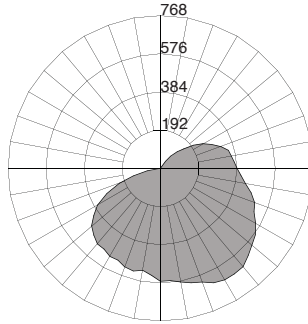

Cat.# SA-132T8...-SYM*
Initial lamp lumens - 2900



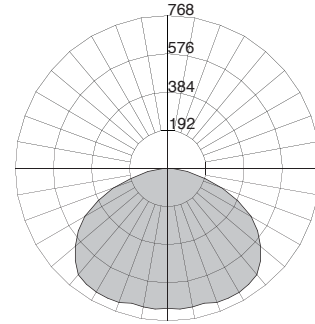


Cat.# SA-132T8...-RASY*
Initial lamp lumens - 2900

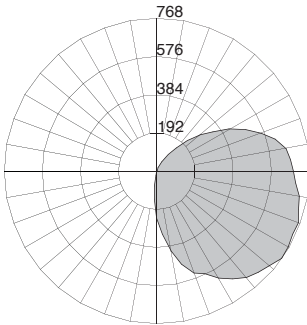

*Housing and solid reflector are finished with high reflectance white baked polyester powder coat paint after fabrication.

Plan view of 7/8" KOs on back of channel

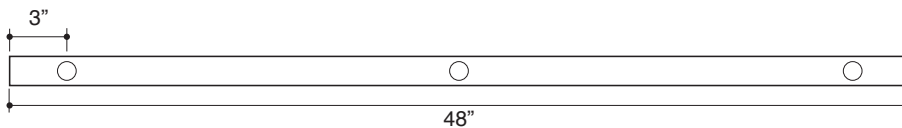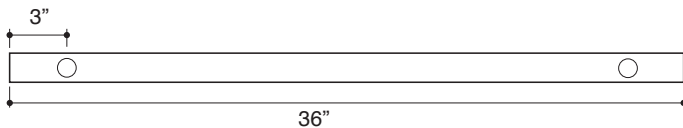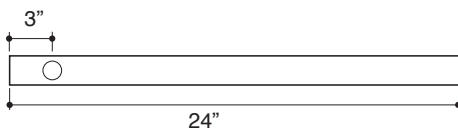

Nominal 6' and 8' are made up of joining two nominal 3' or 4' housings together.

Specifications and dimensions are subject to change without notification.