

Length	Wattage
24"	17T8
36"	25T8
48"	32T8
72"	25T8-6
96"	32T8-8

Project Name:	
Type:	Date:
Catalog #:	

### Description:

The Nulite SAC side mount strip is a specification grade luminaire which is ideal for commercial, retail and industrial applications.

### Specifications:

**Construction:** Die formed 20 gauge cold rolled steel with 16 gauge cold rolled steel end caps and 7/8" KOs for easy wiring. The housing is finished in high reflectance white baked polyester powder coat paint after fabrication. Optional aluminum housing.

**Reflector / Ballast:** Reflector / ballast cover is finished with high reflectance white baked polyester powder coat paint after fabrication. Consult factory for custom reflectors. Standard electronic, class P, ballast. Universal (UNV) voltage ballast is from 120 to 277V.

**Lamping:** 2, 3 or 4 lamp cross-section T8. Nominal 6' or 8' housing is a tandem lamp configuration. Luminaire can be ordered with lamps, consult factory.

**Mounting:** Surface.

**Labels:** UL / cUL listed. Damp location is optional.

### Ordering Information

Sample: SAC-232T8-UNV-PSN-DL




Series	Lamp	Wattage	Voltage	Ballast		Options	
SAC				T8 Options	Ballast Factor		
	2	17T8	UNV	IS (Standard) Instant Start	N Normal (Standard)	EM <sup>2</sup>	Emergency Battery Pack
	3	25T8	120	PS Program Start	L Low	AL	Aluminum Housing
	4	32T8	277	HEIS High Efficiency Instant Start	H High	DL	Damp Location
		25T8-6		HEPS High Efficiency Program Start		GLR	Fusing
		32T8-8	347 <sup>1</sup>	Dimming Options			
				DIM <sup>1</sup> Dimming			
				SD <sup>1</sup> Step Dimming			

#### Notes:

1. Consult Factory.
2. Emergency battery pack is not available for nominal 2' unit; consult factory for 3' unit. Specific voltage must be ordered for this option.
3. Option for 3-light and 4-light cross section.

Specifications and dimensions are subject to change without notification. Specification sheets on our website supersede all other versions. 2010 Rev. A  
Nulite reserves the right to bulk package any order.

**Plan view of 7/8" KOs on back of channel**

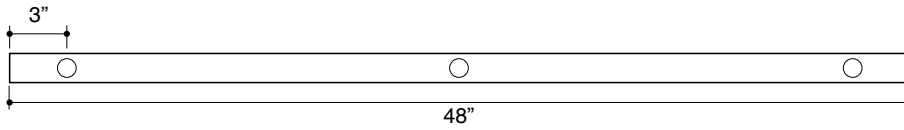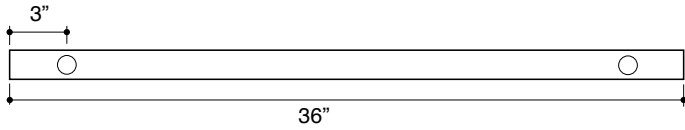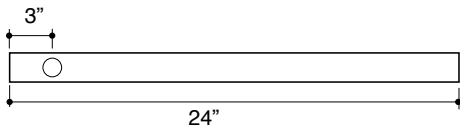

Nominal 6' and 8' are made up of joining two nominal 3' or 4' housings together.