


Mounting Plate (Gasketed)



Ordering Information

Sample: EJL-G-100HPS-480-BZ-FT-PC

Series	Wattage	Voltage	Color	Options
EJL-G	Compact Fluorescent 126CFQ (1) 26W/G24q-3 132CFTR (1) 32W/GX24q-3 142CFTR (1) 42W/GX24q-4 High Pressure Sodium 70HPS 70W HPS/MED 100HPS 100W HPS/MED 150HPS 150W HPS/MED Pulse Start Metal Halide 70MH 70W MH/MED 100MH 100W MH/MED 150MH 150W MH/MED	UNV ¹ 120 277 347 ² 480 ² MT ³ Multi-Tap 120/208/ 240/277	BZ Bronze (Standard) BK Black WH White Consult factory for custom colors.	WT Wide Throw Optics (Standard) FT Forward Throw Optics PC ⁴ Photocell GLR Fusing -20 ⁵ -20°F Cold Start Ballast EM ⁵ Emergency Battery Pack EMLT-4 ⁵ Low Temperature -4°F Emergency Battery Pack


Notes

1. Universal voltage from 120V to 277V for compact fluorescent only.
2. Voltage option for HID only. 480V not available for all wattages, consult factory.
3. Multi-Tap ballast for HID only.
4. Specific voltage must be ordered for photocell option.
5. Compact fluorescent only. Specific voltage must be specified for EM.

Photometric Data

Characteristics - Wide Throw

IES Classification Type I
 Longitudinal Classification Very Short
 Cutoff Classification Full Cutoff
 Total Rated Lamp Lumens 11,700
 Distance in 10' units. Luminaire mounted @ 20' AFG

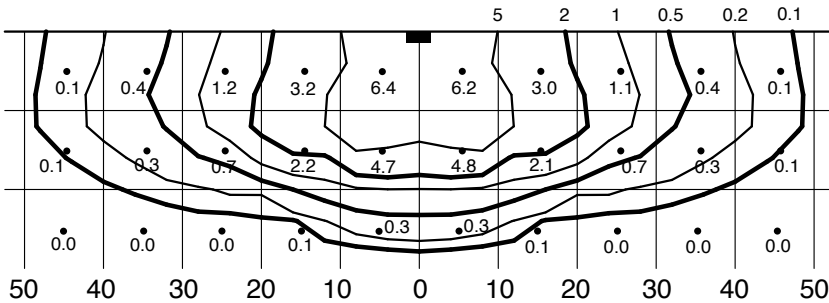

Characteristics - Forward Throw

IES Classification Type II
 Longitudinal Classification Very Short
 Cutoff Classification Full Cutoff
 Total Rated Lamp Lumens 11,700
 Distance in 10' units. Luminaire mounted @ 20' AFG

