



Project Name:	
Type:	Date:
Catalog #:	

## Description:

The Nulite DW series is a decorative linear fluorescent luminaire with optional top, front or top & front shields for multiple light distributions. Wall or ceiling mounted individually or continuously.

## Specifications:

**Construction:** Die formed cold rolled steel housing and end caps finished with white enamel paint.


**Diffuser:** Acrylic prismatic lens. Optional smooth white acrylic lens.

**Reflector / Ballast:** Ballast cover is finished with high reflectance white powder coat paint. Standard electronic, Class P, ballast. Universal (UNV) voltage ballast is from 120 to 277V.


**Lamping:** 1 or 2 lamp cross-section in nominal 2', 3', or 4' lengths. Luminaire can be ordered with lamps, consult factory.

**Mounting:** Wall, individually or continuous rows.

**Labels:** UL / cUL listed. Damp location is optional.

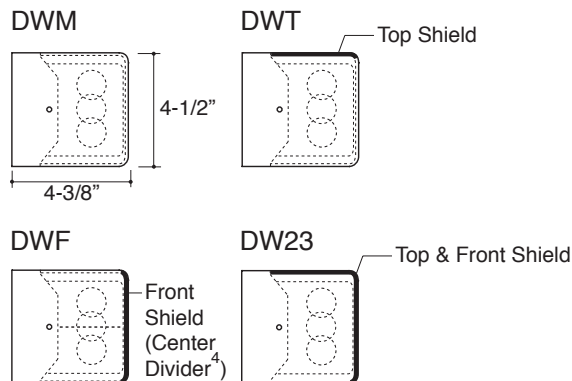

Side View

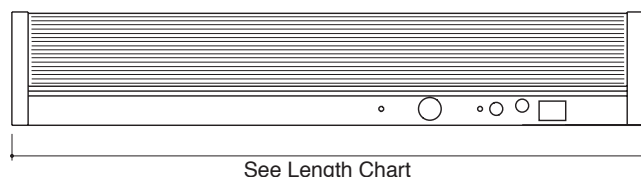

Length	Wattage
24-1/4"	14T5, 24T5HO, 17T8
36-1/4"	21T5, 39T5HO, 25T8
48-1/4"	28T5, 54T5HO, 32T8

## Ordering Information

Sample: DWF-132T8-120-HEISN-WH-ASW

Series	Lamp	Wattage	Voltage	Ballast		Color	Options
DWM (No Shielding)	1	14T5	UNV	T8 Options	Ballast Factor	WH White (Standard)	ASW Acrylic Smooth White Lens
DWT (Top Shield)	2	24T5HO	120	IS (Standard)	N Normal (Standard)	CH <sup>5</sup> Chrome	EM <sup>2</sup> Emergency Battery Pack
DWF (Front Shield)		17T8	277	PS	L Low		TS Turn Switch (120V Only)
DW23 (Top & Front Shield)		21T5	347 <sup>1</sup>	HEIS	H High		PS Pull Switch (120V Only)
		39T5HO		T5/T5HO	Ballast Factor		NL Night Light
		25T8		PS (Standard)	N Normal (1.0)		CR Continuous Row
		28T5		HEPS <sup>1</sup>			GLR Fusing
		54T5HO		All Lamp Dimming Options			CO Convenience Outlet (120V Only)
		32T8		DIM <sup>1</sup> Dimming			4PS <sup>3</sup> 4-Way Switch (120V Only) Must be ordered with 2BL option.
				SD <sup>1</sup> Step Dimming			2BL <sup>4</sup> Dual Level Independent Switching
				IS=Instant Start			QW Quick Through Wiring for Continuous Row Applications
				PS=Program Start			
				HEIS=High Efficiency Instant Start			
				HEPS=High Efficiency Program Start			

### Notes:

1. Consult factory.
2. Specific voltage must be ordered for this option. Consult factory for nominal 2' units.
3. Available for 2 lamp cross-section only for series DWF.
4. Center divider when ordered with dual level independent switching option.
5. Housing channel is white. End caps and baffle shields are switching from chrome to bright anodized aluminum.

Specifications and dimensions are subject to change without notification. Specification sheets on our website supersede all other versions. 2011 Rev. C  
Nulite Lighting reserves the right to bulk package any order.