

Type:	Project:	Qty:
	Date:	
Catalog #:		

**Description:**

The Nulite WAVR series is a vandal resistant low profile surface mounted lensed luminaire. The polycarbonate prismatic lens and rugged housing will withstand high traffic applications.

**Specifications:**

**Construction:** Housing is die formed of 16 gauge cold rolled steel. Housing is finished with white polyester powder coat paint. Extruded clear prismatic polycarbonate lens removable by tamper resistant spanner head screws.


**Reflector / Ballast:** Ballast cover/pan is formed and finished with high reflectance white paint. Standard electronic, Class P, ballast. Universal (UNV) voltage ballast is from 120 to 277V.

**Lamping:** 2 or 4 lamp cross-section T5, T5HO or T8. Luminaire can be ordered with lamps, consult factory.

**Mounting:** Surface.

**Labels:** UL / cUL listed. Damp location is optional.

(2 or 4-light cross-section)

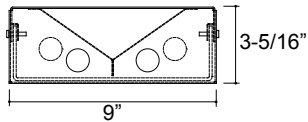

Length	Wattage
25"	14T5, 24T5HO, 17T8
37"	21T5, 39T5HO, 25T8
49"	28T5, 54T5HO, 32T8

**Ordering Information**

Sample: WAVR-432T8-UNV-ISN-DL

Series	Lamp	Wattage	Voltage	Ballast	Options
WAVR					
	2	14T5	UNV	T8 Options	Ballast Factor
	4	24T5HO	120	IS (Standard) Instant Start	N Normal (Standard)
		17T8	277	PS Program Start	L Low
		21T5	347 <sup>1</sup>	HEIS High Efficiency Instant Start	H High
		39T5HO		HEPS High Efficiency Program Start	
		25T8		T5/T5HO	Ballast Factor
		28T5		PS (Standard) Program Start	N Normal
		54T5HO		HEPS <sup>1</sup> High Efficiency Program Start	
		32T8		All Lamp Dimming Options	
				DIM <sup>1</sup> Dimming	
				SD <sup>1</sup> Step Dimming	

Notes:


1. Consult factory.

2. Specific voltage must be ordered for this option. Consult factory for nominal 2' units.




Specifications and dimensions are subject to change without notification. Specification sheets on our website supersede all other versions. 2015 Rev. D  
Nulite reserves the right to bulk package any order.

Photometric Curve

Cat.# WAVR-232T8...  
Initial lamp lumens - 6100 (2 lamps)

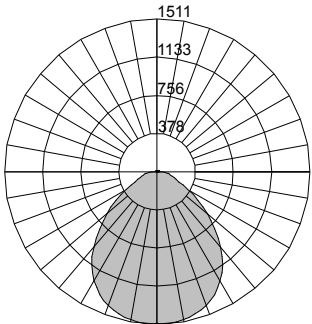

Plan view of KOs on back of housing

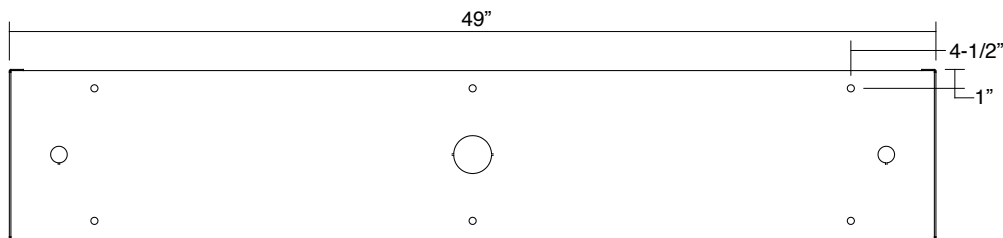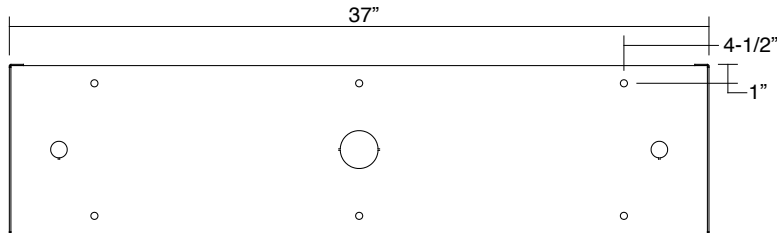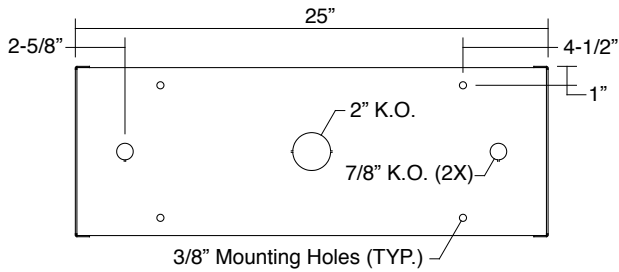

Specifications and dimensions are subject to change without notification.