




NULITE

10770 EAST 51ST AVENUE / DENVER, COLORADO 80239

P 303 287 9646 / WWW.NULITE-LIGHTING.COM

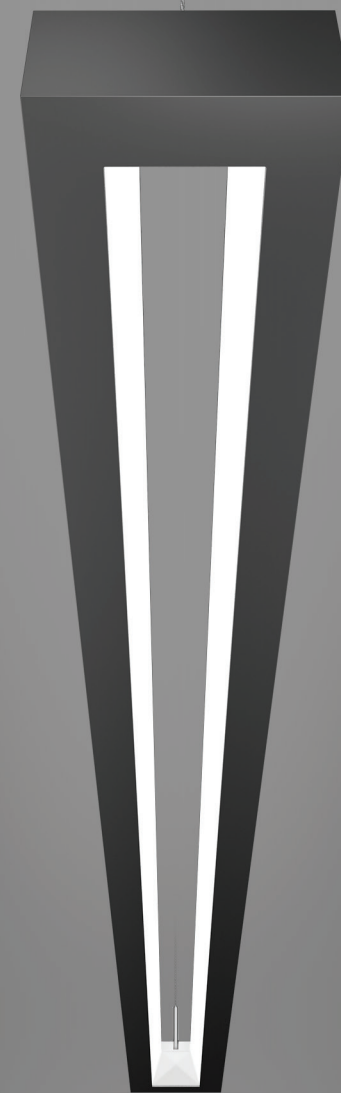


QūB

PENDANT LUMINAIRE

NULITE

QūB

PENDANT LUMINAIRE



SERIES

QUB - Qūb pendant

LIGHT DISTRIBUTION

20 - 20% downlight / 80% Uplight

LUMEN PACKAGE¹/ CCT/ CRI

08 - 750 Lms/ft	L30 - 3000K, 80 CRI
10 - 1000 Lms/ft	L35 - 3500K, 80 CRI
13 - 1250 Lms/ft	L40 - 4000K, 80 CRI
15 - 1500 Lms/ft	H30 - 3000K, 90 CRI
19 - 1850 Lms/ft	H35 - 3500K, 90 CRI
	H40 - 4000K, 90 CRI

VOLTAGE

UNV - Universal Voltage
120 - 120 volts
277 - 277 volts

DRIVER

Dimming 0-10v

D² - Dim to 1%
D0² - Dim to 0%

Lutron Dimming

Refer to data sheet on website for ordering code

DALI Dimming

ELE - Eldoled Ecodrive, dims to 1%
ELS - Eldoled Solodrive, dims to 0%
ELD² - Eldoled Dualdrive, dims to 0%

CIRCUIT

1C - Single Circuit
1E - Single Circuit with EM Circuit
1B - Single Circuit with Battery Pack

COLOR / FINISH

WH - White (Standard)
SV - Silver
BK - Black
CC - Custom Color³

MOUNTING/ DRIVER ENCLOSURE

Grid Ceiling

T1 - T1 Ceiling Grid
T9 - T9 Ceiling Grid
TS - Slot T Grid

Sheet Rock Ceiling

GP - Sheet Rock or inaccessible ceiling

Ceiling Surface Mount

SR - Surface mount driver enclosure mounts to ceiling structure
(Add “**B**” after mounting code for a black canopy)

SUSPENSION LENGTH

48 - 48” adjustable aircraft cable
120 - 120” adjustable aircraft cable


LENGTH

2’ - 2’ Individual Luminaire
4’ - 4’ Individual Luminaire
6’ - 6’ Individual Luminaire
8’ - 8’ Individual Luminaire
XX - Continuous Row, specify run length in 2’ increments

CONSTRUCTION Extruded aluminum housing with die cast aluminum end caps. Powder coat white finish is standard. Optional silver, black or custom colors. **OPTICS** Open optical system creates an optimal direct-indirect light distribution through the precise design and alignment of LED emitters and luminaire painted reflector surfaces. **DRIVER/ENCLOSURE** Standard constant current electronic driver housed in a separate enclosure with 0-10V dimming input; dimming range from 100% down to 1%, other dimming options are available. One remote driver enclosure per unit. Universal (UNV) voltage is from 120 - 277V, 50/60 Hz. Optional drivers available. **LED MODULE** Distributed LED array in a variety of lumen output packages. LED color is available in 3000K, 3500K or 4000K with CRI of 80 or 90. Modules are replaceable. L90 ≥ 100,000 hours. **MOUNTING** Pendant, individual or continuous run. **LABELS** ETL listed, conforms to UL Standard 1598 / 8750 and CSA Standard C22.2. Damp location. **WARRANTY** 5-year limited warranty on LED and Driver.


Notes:

1. Nominal lumen output for 3500k
2. Consult factory for specifications and manufacturer
3. Consult factory for availability

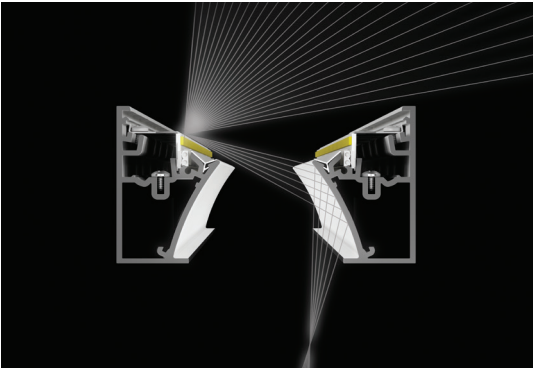


ADVANCED OPTICS

Qūb’s open optical system creates an optimal direct-indirect light distribution through the precise design and alignment of LED emitters and luminaire reflective surfaces.

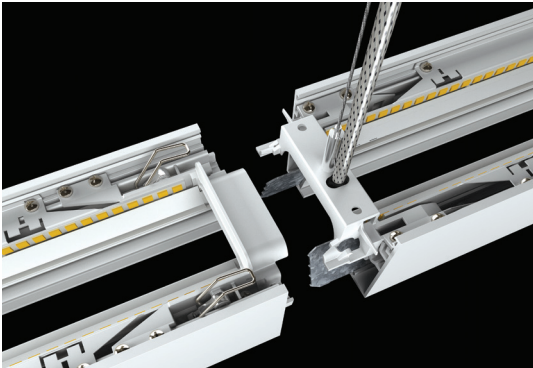

INNOVATIVE ENGINEERING

Nulite’s highly engineered luminaire joining design allows for simple and intuitive assembly in the field without tools. It’s torsion latches act as springs and ensure that luminaire rows snap into a laser straight line.

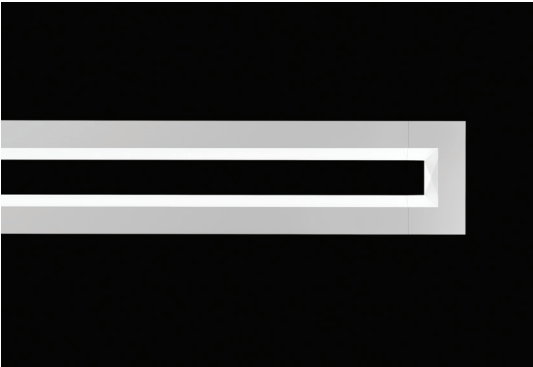

MODERN DESIGN

Qūb’s timeless and minimalist design complements any interior architectural environment.



SIMPLE INSTALLATION

Unique small-scale canopy power supply works with all types of ceilings while fitting into the tightest spaces. Innovative canopy design allows for driver access without removing the luminaire.