

Type:	Project:	Qty:
	Date:	
Catalog #:		

Description:

The Regolo LED wall series is a nominal 6" wide profile unit. The slender design is ideal for corridors, open and private offices, classrooms, lobbies and general purpose rooms.

Specifications:

Construction: The housing consists of visible extruded aluminum side rail with formed cold rolled steel back channel and heavy gauge end caps. Housing can be joined together for continuous row applications. Standard finish is powder coat textured white. Optional silver, black or custom color paint finishes.

Reflector / Driver: Reflector / driver cover is finished with high reflectance white paint. Optional asymmetric semi-specular aluminum reflector. Standard constant current electronic driver with 0-10V dimming input; dimming range from 100% down to 10%. Universal (UNV) voltage is from 120 - 277V, 50/60 Hz.


Direct Shielding: Extruded frosted or satin white acrylic snap-in lens with DR. Consult factory for uplight shielding.

LED Module: Distributed LED array in a variety of lumen output packages. LED color is available in (L30) 3000K, (L35) 3500K or (L40) 4000K. Module is replaceable. L90 ≥ 100,000 hours.

Mounting: Wall mount, individual mount or continuous runs.

Labels: ETL listed, conforms to UL Standard 1598 / 8750 and CSA Standard C22.2, Damp location.

Warranty: 5-year limited warranty on LED and Driver.

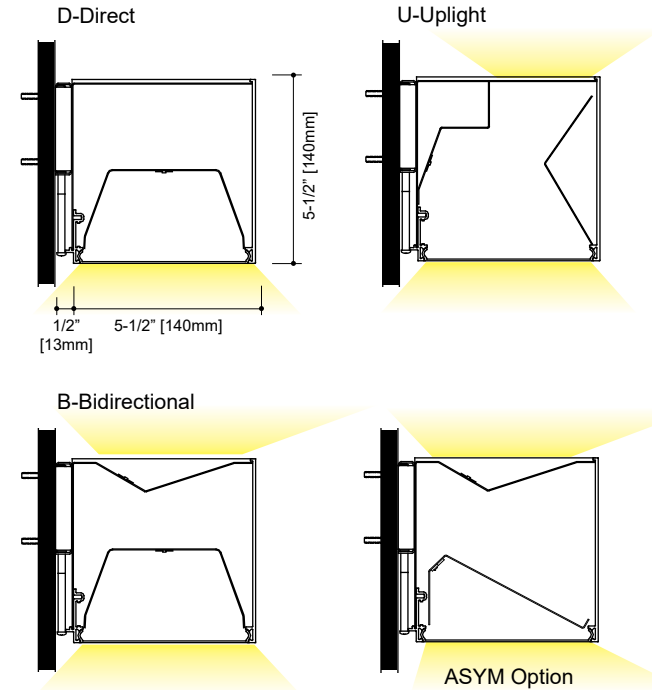

Ordering Information

Sample: RW6-6D-06L35-UNV-D-1C-FRF-SV-20'

Series	Height / Distrib.	Lumen Package ³ / Color	Voltage	Driver	Circuit	Shielding	Color	Length	Options	
RW6										
RW6 (Wall - Nom. 6")	6	D Direct	05 (~586 lm/ft, 5.25W/ft)	L30	UNV	1C Single Circuit	FRF (Frosted Flush)	WH (White)	2'	ASYM ⁸ Asymmetric Reflector Direct GLR Fusing
		B ¹ Bidirectional	06 (~746 lm/ft, 6.83W/ft)	L35	120	1E Single Circuit w/ EM Circuit	STF (Satin White Flush)	BK (Black)	3'	
		U ² Uplight	09 (~905 lm/ft, 8.43W/ft)	L40	277	1B Single Circuit w/ Battery Pack	Consult factory for uplight shielding or dust cover.	SV (Silver)	4'	
			10 (~1062 lm/ft, 10.1W/ft)			2C ⁶ Dual Circuit		CC (Custom Color)	5'	
			13 (~1274 lm/ft, 12.3W/ft)			2E ⁶ Dual Circuit w/ EM Circuit			6'	
			17 (~1583 lm/ft, 15.5W/ft)			2B ⁶ Dual Circuit w/ Battery Pack			7'	
				Consult Factory for Custom Lumen Package					8'	
				Dimming (0-10V)						
				D ⁴ (Dim to 10%)						
				D1 ⁵ (Dim to 1%)						
				D0 ⁵ (Dim to 0%)						
				Lutron Dimming						
				See Page 2 for Ordering Codes						
				DALI Dimming						
				eldoLED ECOdrive						
				ELE (Dim to 1%)						
				eldoLED SOLOdrive						
				ELS (Dim to 0%)						
									Continuous Runs⁷	
									XX: Specify run length in 1 foot increments. Consult factory for custom lengths.	

Notes:


- Standard Watts per Foot: (05) 8.65W/ft, (06) 11.28W/ft, (09) 14W/ft, (10) 16.6W/ft, (13) 20.7W/ft, (17) 26.14W/ft. For Bidirectional with not the same output, specify lumen package down / lumen packae up (ie. 05DN/09UP).
- Only available in 1 foot increments.
- Nominal lumen output per foot for frosted lens and 3500K.
- Standard driver, don't connect low-voltage wires for non-dimming applications. Consult factory for specifications and manufacturer.
- Consult factory for specifications and manufacturer.
- Bidirectional ONLY.
- 6" increments are common custom lengths. We can provide custom run length down to the nearest (+/- 1/8").
- Only available with Frosted Flush lens.



Specifications and dimensions are subject to change without notification. Specification sheets on our website supersede all other versions. 2016 Rev. D1 Nulite reserves the right to bulk package any order.

Lens Options

Shielding



Frosted Lens
This diffuser is designed for a balance between efficiency and lens uniformity. (Transmission ~ 89%)

Satin White Lens
This diffuser is designed for visible lens uniformity. It's recommended for regressed lens configuration in our shallow housing. (Transmission ~ 69%)

Position



Drop Lens w/ Opaque End




Drop Lens w/ Luminous End

Lutron Driver Ordering Codes


Nulite Code	Lutron Prefix	Lutron Series	Dim Level	Control Type	
				3-Wire	Eco-System™
L11	L3DAE	Hi-lume™	1%		Yes
L12	L3DA3W	Hi-lume™	1%	Yes	
L15	LDE1*	Hi-lume™ - H Series	1%		Yes
L16	LDE5	5-Series	5%		Yes

* Soft-on, Fade-to-Black™

Wall Mounting Plate Detail

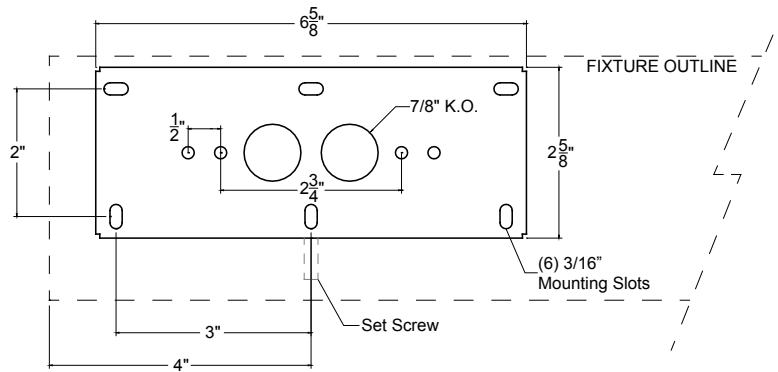

Individual Lengths

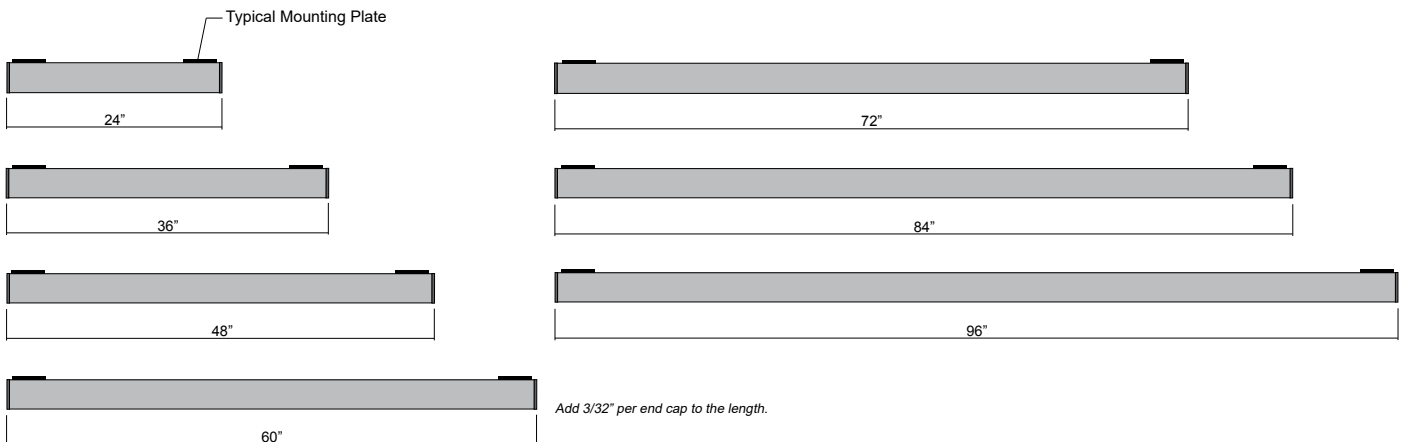


Specifications and dimensions are subject to change without notification.

Continuous Run Lengths


		Run Length																																																	
		2'	3'	4'	5'	6'	7'	8'	9'	10'	11'	12'	13'	14'	15'	16'	17'	18'	19'	20'	21'	22'	23'	24'	25'	26'	27'	28'	29'	30'	31'	32'	33'	34'	35'	36'	37'	38'	39'	40'	41'	42'	43'	44'							
Number of Housings	2'	1																																																	
	3'		1																																																
	4'			1						1	1	1	1					1	1	1	1						1	1	1	1						1	1	1	1					1	1	1	1				
	5'				1					1			1					1			1						1								1				1						1						
	6'					1					1			1					1			1					1								1				1						1						
	7'						1					1			1					1			1					1							1				1						1						
	8'							1				1	1	1	1	1	2	1	1	1	1	2	2	2	2	3	2	2	2	3	3	3	3	4	3	3	3	4	4	4	4	4	5	4	4	4	4	5			

Add 3/32" per end cap to the length.

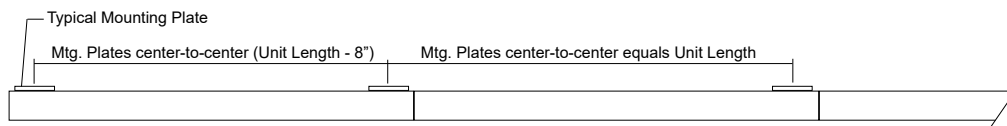


Photometric Curves

Cat. # RW6-6D-05L35-...-FRF-...-4'
Wattage/ft - 5.25
Lumens/Watt - 112



Cat. # RW6-6D-05L35-...-FRF-...-4'-ASYM
Wattage/ft - 5.25
Lumens/Watt - 109



Cat. # RW6-6U-05L35-...-FRF-...-4'
Wattage/ft - 5.83
Lumens/Watt - 96

