



Sottile 2D (1x1)

L1D Series

Project Name:	
Type:	Date:
Catalog #:	

Description:

The Nulite Sottile [so-tee-lay] 2D series is a new fully luminous architectural recessed luminaire. This cost effective, energy efficient luminaire series provides soft ambient illumination.

Specifications:

Construction: Die formed 20 gauge cold rolled steel housing and powder coated white paint after fabrication. Access plate allows for easy wiring without opening luminaire.



Reflector / Ballast: Ballast cover/pan is finished with high reflectance white paint. Standard electronic, Class P, ballast. Universal (UNV) voltage is from 120 - 277V.

Shielding: Extruded 3-piece smooth frosted acrylic diffusers. Spring tension shift-and-remove center diffuser for convenient lamp maintenance. Optional center diffusers: internal radial white baffle with clear linear prism, frosted linear prism, clear smooth with round perf overlay and white metal perf with inlay.

Lamping: 1 lamp cross-section. Luminaire can be ordered with lamps, consult factory.

Mounting: Flanged for acoustical tile or inaccessible ceiling. Non-IC rated. Optional surface mount.

Labels: UL / cUL listed. Optional Damp location.

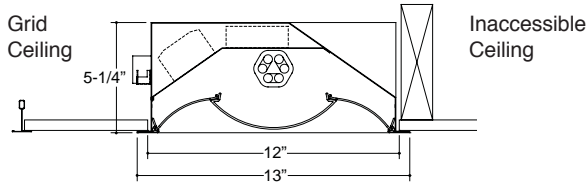

Ordering Information


Sample: L1D-132CFTR-UNV-PSN-RFD

Series	Lamp	Wattage	Voltage	Ballast		Options	
L1D	1						
(Nom. 1' width)		26CFQ	UNV	CFQ/CFTR	Ballast Factor	IRB	Internal Radial White Baffle with Clear Linear Prism Center Diffuser
		32CFTR	120	PS (Standard) Program Start	N Normal	RFD	Frosted Linear Prism Center Diffuser
		42CFTR	277	All Lamp Dimming Options		RPO	Round Perforated Overlay Center Diffuser
				DIM ¹ Dimming		MPF	White Metal Perforated Center w/ Inlay
						EM ²	Emergency Battery Pack
						GLR	Fusing
						DL	Damp Location
						CP	Chicago Plenum
						SF	Surface Mount
						LRC	Lens Retainer Clip
						FLEX3	6' of Flex, 3-wire

Notes:

1. Consult factory.
2. Specific voltage must be ordered for this option. Some emergency battery packs require remote mounting, consult factory.


Center Diffuser Options




IRB



RFD




RPO



MPF

Grid Ceiling Mounting Detail

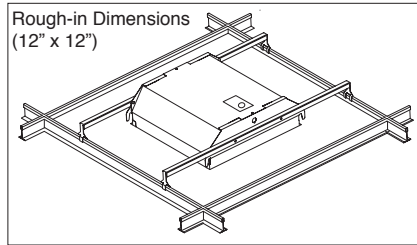

Standard mounting - (2) provided hanger brackets clip onto grid, 2' width, in the middle of the tile.

Surface Mounting



SF Option