



SOTTILE L2D2 / L2D4

Surface Mount

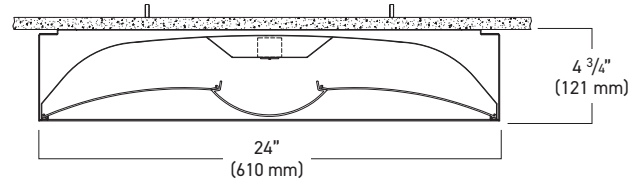


- Architectural surface mount that provides soft, high ambient lighting for open and private offices, classrooms, and general purpose rooms.
- Standard housing is die formed cold rolled steel housing. Housing finish is white baked enamel.
- Long-life distributed LED array in a variety of lumen output packages. LED color is available in 3000K, 3500K or 4000K with a CRI of 80 or 90. Custom outputs are available. L90>100,000 hours.
- Standard constant current electronic drive with 0-10V dimming inputs; dimming range from 100% down to 1%. Dims to 0% and DALI are available.
- Extruded 3-piece smooth frosted acrylic diffuser.

L2D2 (Round Lens)
100% Downlight




2'x2'



Length 24"
Width 24"
Depth 4 3/4"

2'x4'



Length 48"
Width 24"
Depth 4 3/4"

ORDERING INFORMATION

SAMPLE NUMBER: L2D2-R-30L35-U-D-W-SF

L2D					
SERIES	SIZES	LUMEN PACKAGE ¹		CRI/CCT	BATTERY OPTIONS ³
L2D - Sottile 2' width recessed grid	2 - 2' x 2' 4 - 2' x 4'	2' x 2' 20 - 2000 LM 20HP - 2000 LM 30 - 3000 LM 30HP - 3000 LM 40 - 4000 LM XX ²	2' x 4' 30 - 3000 LM 30HP - 3000 LM 40 - 4000 LM 40HP - 4000 LM 50 - 5000 LM 50HP - 5000 LM 60 - 6000 LM 70 - 7000 LM XX ²	L30 - 80 CRI, 3000K L35 - 80 CRI, 3500K L40 - 80 CRI, 4000K L50 - 80 CRI, 5000K H30 - 90 CRI, 3000K H35 - 90 CRI, 3500K H40 - 90 CRI, 4000K	B5 - 5W Battery Pack B7 - 7W Battery Pack B10 - 10W Battery Pack B12 ⁴ - 12W Battery Pack CEC - CEC Compliant (10W Battery Pack)

- Notes:**
1. Nominal lumen output for 3500K, 80 CRI
 2. Consult factory for custom lumen package
 3. 2x2 will require additional housing that increases height of fixture by 2-in.
 4. 12W battery will be remote with 2' luminaires
 5. Consult factory for specifications and custom dimming options. See page 2 for additional information
 6. Consult factory for additional options
 7. Specify 1 - 120 volt or 2 - 277 volt

VOLTAGE	DRIVER ⁵		W	SF	OPTIONS ⁶
			LUMINAIRE FINISH	MOUNTING OPTIONS	
U - Universal 1 - 120 Volt 2 - 277 Volt	Dimming 0-10V D - Dims to 1% (Standard) D0 - Dims to 1%, fade to off D02 - Eldoled Solodrive, dims to 0%	DALI Dimming ELE - Eldoled Ecodrive, dims to 1% ELS - Eldoled Solodrive, dims to 0% Lutron Dimming L11 - Lutron HiLume™ Premier, dims to 0.1% L12 - Lutron HiLume™ 2-Wire 120V Forward Phase, dims to 1% L15 - Lutron HiLume™ H-Series, dims to 1% L16 - Lutron HiLume™ 5-Series, dims to 5%	W - White (Standard)	SF - Surface Mount	RPO - Round perforated overlay center diffuser CP - Chicago plenum SIC - Seismic clips 20PAF - 20 ga. CRS / paint after Fabrication GLR - Fusing FLEX3 - 6' of Flex, 3-wire FLEX5 - 6' of Flex, 5-wire ETS ⁷ - Electronic transfer switch GTD ⁷ - Generator transfer device UP - Unit pack

PHOTOMETRICS

L2D2

Cat # L2D2-R-30L35-U-D-W-SF


ITL Test #: ITL 84432

Total Delivered Lumens: 2599

Input Watts: 23.8

Efficacy: 109 lm/W

100% Downlight

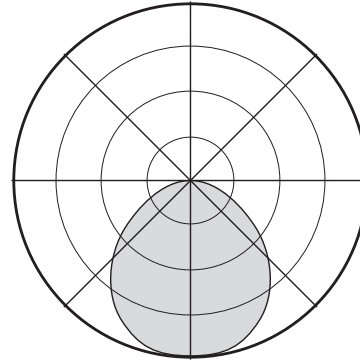

Luminance Data (CD/SQ.M)

Angle in Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	1136	1245	1300
55	1010	1178	1231
65	862	1083	1120
75	694	1022	1049
85	517	1065	746

Zonal Lumen Summary

Zone	Lumens	%Fixt
0-30	716	28
0-40	1173	45
0-60	2054	79
0-90	2599	100
0-180	2599	100

LIGHTING CONTROL

Nulite provides flexibility in meeting the needs of each project by easily integrating with several manufacturers for lighting control options.

0-10V: A non-directional dimming system. The control system tells the LED driver what to do and it adjusts according to the voltage on the control circuit.

DALI: Digital Addressable Lighting Interface is a simple two-wire control connection that goes to each fixture to form the control network. It allows LED drivers to be controlled independently from lighting control circuits.

Solution	Manufacturer	Prefix	Series	Dim Level	Quantity of Wires	Dim to Dark (Smooth)	Fade to Off
Dimming 0-10V							
D	Variable			1%	2		
D0	Variable			0%	2		X
D02	eldoLed		SOLOdrive	0%	2	X	
DALI Dimming							
ELE	eldoLed		ECOdrive	1%	2	X	
ELS	eldoLed		SOLOdrive	0%	2	X	
Lutron Dimming							
L11*	Lutron	PEQ	Hi-Lume Premier	0.1%	2	X	
L12	Lutron	LTEA	Hi-lume™ 2-Wire 120V forward phase	1%	No Control Wires - Uses Hot		
L15	Lutron	LDE1	Hi-lume™ - H Series	1%	2	X	
L16	Lutron	LDE5	5-Series	5%	2		

*Maximum lumen package is 20 and 20HP

LIGHT OUTPUT AND ENERGY CONSUMPTION*


2x2				2x4			
Lumen Package	Input Watts	Output Lumens	Efficacy	Lumen Package	Input Watts	Output Lumens	Efficacy
20 (2000)	15.9	1880	118	30 (3000)	23.8	3045	128
20HP** (2000)	15.9	2085	131	30HP** (3000)	23.8	3387	132
30 (3000)	23.8	2599	109	40 (4000)	31.7	3858	122
30HP** (3000)	23.8	2951	124	40HP** (4000)	31.7	4282	135
40* (4000)	31.7	3743	118	50 (5000)	39.6	4608	116
				50HP** (5000)	39.6	5182	131
				60** (6000)	47.6	6085	128
				70** (7000)	55.4	6912	125

*Lumen output may vary. 3500K utilized for above results. Multiply output by 95.3% for 3000K and 102.6% for 4000K @ 80CRI

**Based on 2-board cross section


MOUNTING DETAILS

SURFACE MOUNT

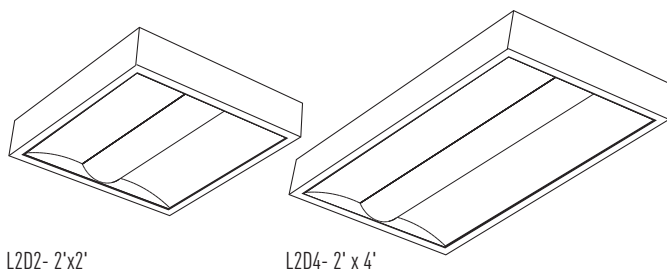

ADEQUATE SUPPORT STRUCTURE AND MOUNTING HARDWARE (PROVIDED BY OTHERS)

MOUNTING OPTION ONE:
(4) HOLES ARE PROVIDED FOR MOUNTING SURFACE BOX AND REINSTALLING LUMINAIRE

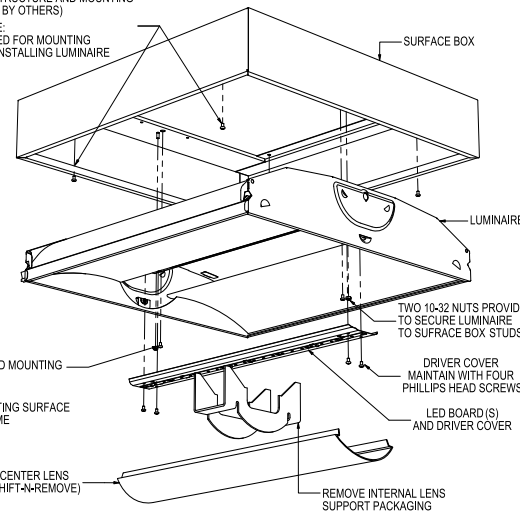

ADEQUATE SUPPORT STRUCTURE AND MOUNTING HARDWARE (PROVIDED BY OTHERS)
MOUNTING OPTION TWO:
(2) HOLES ARE PROVIDED FOR MOUNTING SURFACE BOX AND LUMINAIRE AT THE SAME TIME

PRODUCT DETAILS

LIGHT SOURCE LED custom linear array is mounted with quick-connect wiring to facilitate service. A wide array of lumen packages are available. All luminaire configurations tested in accordance with IESNA LM-79. Diodes tested in accordance with IESNA LM-80.

DRIVER Standard constant electronic driver with 0-10V dimming input standard; dimming range from 100% down to 1%. Dims to 0% and DALI available. Universal (U), 120 volt (1) and 277 volt (2).

OPTIONAL DALI Digital Addressable Lighting Interface is a simple two-wire control connection that goes to each fixture to form a the control network. DALI enables dimmable transformers, relay modules, emergency fittings, and controllers from different manufacturers to be mixed and matched into a single control system, allowing LED drivers to be controlled independently from lighting control circuits.

OPTIONAL BATTERY AND EMERGENCY OPTIONS Recyclable Ni-Cad battery pack, battery run time is 90 minutes. 5W, 7W, 10W or 12W battery packs are available. Total output is determined by exact efficacy of specified configuration multiplied by battery wattage (i.e. L2D2-30L35-U-D-W-SF with a 10W battery pack is a 1,090 battery lumen output). Recharge time of 24 hours.

MOUNTING Refer to installation instructions for appropriate mounting detail.

WARRANTY 5 -year limited warranty on LED and driver from date of shipment. Refer to the full warranty details on www.nulite-lighting.com.

WEIGHT 2x2 - ~25 lbs., 2x4 - ~33 lbs.

APPROVALS ETL listed, conforms to UL Standard 1598 / 8750 and CSA Standard C22.2, indoor dry/damp locations.

INDEPENDENT TESTING

IESNA LM79 - Testing method for the Electrical and Photometric Measurements of Solid State Lighting on the complete system, such as luminous flux, electrical power, luminous intensity distribution, and various properties of chromaticity.

IESNA LM80 - Testing method for measuring lumen maintenance of LED light sources, applies to the LED package, array or module alone, not the complete system.