

Project Name:	
Type:	Date:
Catalog #:	

**Description:**

The Nulite Metallo Sottile 2D LED series features a luminous center acrylic lens. This cost effective LED luminaire series provides soft ambient illumination for reduced ceiling plenum applications.

**Specifications:**

**Construction:** Die formed cold rolled steel housing and powder coated white paint after fabrication.

**Reflector / Driver:** LED pan is finished with high reflectance white paint. Constant current electronic driver with 0-10V dimming input. Universal (UNV) voltage is from 120 - 277V, 50/60Hz.


**Shielding:** Extruded snap-on smooth frosted acrylic diffuser. Optional smooth clear center with round perf overlay.

**LED Module:** Distributed LED array in a variety of lumen output packages. LED color available in (L30) 3000K, (L35) 3500K or (L40) 4000K. Module is replaceable. L70 ≥ 50,000 hours.

**Mounting:** Acoustical grid, Non-IC rated.

**Labels:** ETL listed, conforms to UL Standard 1598 and 8750. Damp location listed.

**Warranty:** 5-year limited warranty on LED and Driver.

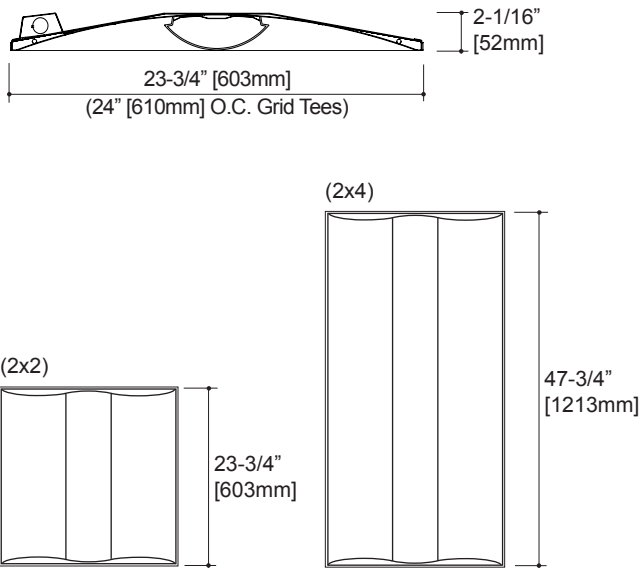

**Ordering Information**

Sample: M2D-2-30L35-UNV-DIM-DL


Series	Length <sup>1</sup>	Lumens <sup>2</sup>	Color	Voltage	Driver	Options
M2D						
(Nom. 2' width)	2	(Nom. 2')	L30	UNV	DIM <sup>3</sup> Dimming	RPO Round Perf Overlay Center Diffuser
	4	20 20HP 30 40	L35 L40	120 277		SIC Seismic Clips
		(Nom. 4')				DSR Daylight Sensor - Remote
		30 30HP 40 40HP 50 60				CP Chicago Plenum
						FLEX3 6' of Flex, 3-wire ("Class 2" low voltage control wires not sleeved in flex)

**Notes:**


1. Nominal for 2' and 4' grid ceiling.
2. Preliminary nominal lumen packages. Optional perf diffuser will reduce output.
3. 0-10V dimming input, consult factory.




**Grid Ceiling Mounting Details**



1" Tee Grid



9/16" Tee Grid



Screw Slot Grid