


Lutron Driver Ordering Codes

Nulite Code	Lutron Prefix	Lutron Series	Dim Level	Control Type	
				3-Wire	Eco-System™
L11	L3DAE	Hi-lume™	1%		Yes
L12	L3DA3W	Hi-lume™	1%	Yes	
L15	LDE1*	Hi-lume™ - H Series	1%		Yes
L16	LDE5	5-Series	5%		Yes

* Soft-on, Fade-to-Black™

Unit Lengths

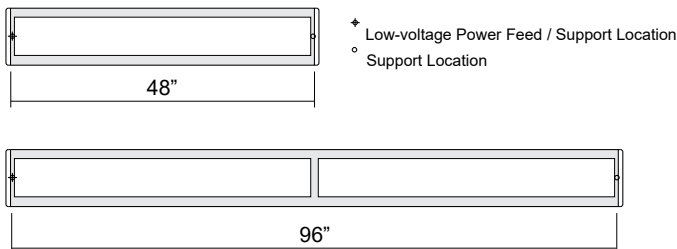

End caps add 2-1/4" to overall length.

Continuous run made up of 4' and 8' units.

Standard Run Length Configurations

Unit Length	Nominal Run Length																			
	4'	8'	12'	16'	20'	24'	28'	32'	36'	40'	44'	48'	52'	56'	60'	64'	68'	72'	76'	80'
4'	1		1		1		1		1		1		1		1		1		1	
8'		1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10

For other configurations, consult factory.

Remote Drivers



Driver Mounting - T1 / T9 / TS

Grid Box (Accessible Ceiling)



Driver box attaches to Tee bar near 3" power canopy. One driver box per unit.

Driver Mounting - GP

Recessed Driver Canopy Assembly (Gypsum Board)

Our recessed driver canopy assembly allows for tool-less access to the driver while the luminaire is suspended. This design eliminates service issues with remote drivers in non-accessible ceiling applications.

Designed for new construction or retrofit applications.



Specifications and dimensions are subject to change without notification.