


BOUNCE

Recessed LED Troffer

BRM4 Series / 4 Illuminated Sides

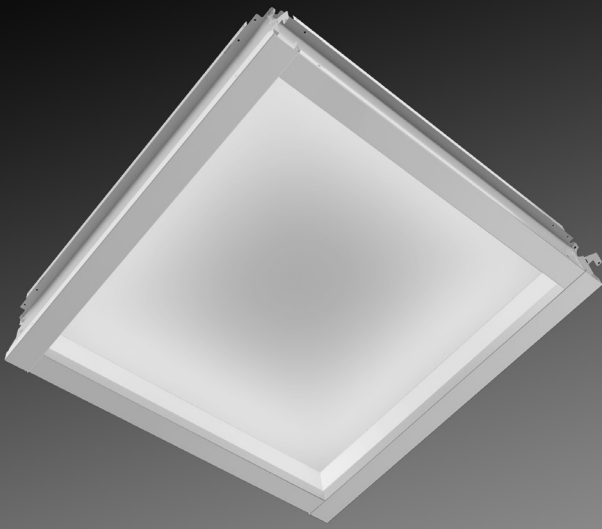

Bounce BRM series is a grid lay-in luminaire designed to eliminate glare from the office environment. The LEDs are concealed from view and top reflector indirectly reflects soft diffuse light into the work space.

Construction: Standard housings are die-formed 22 gauge cold rolled steel with a matte white powder coat painted finish.


Driver: Reflector / driver cover is finished with high reflectant white paint. Drivers are standard constant current electronic drivers with 0-10V dimming input with dimming range from 100% down to 1% and Universal (UNV) voltage from 120 - 277V, 50/60 Hz.

LED Module: Distributed LED array in a variety of lumen output packages. LED color is available in 3000K, 3500K, 4000K or 5000K and in 80CRI or 90CRI. Module is replaceable. Projected life is 90% of the light output at 100,000 hrs.

Mounting: Installs into most grid ceilings (1", 9/16", and Tegular or "Slot-T"). May also be installed into inaccessible ceilings with a separate flange kit (FLG).

Labels: ETL Listed, conforms to UL Standard 1598/8750, CSA Standard C22.2 and Damp Location.

Warranty: 5-Year Warranty Standard

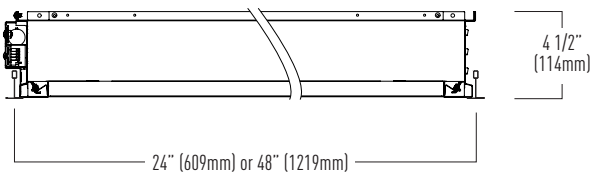

ORDERING INFORMATION / Example: BRM4-24-45-L35-U-D-W

SERIES	SIZE	LUMEN PACKAGE ¹		CRI/CCT	BATTERY OPTIONS
BRM4 - Bounce Recessed, Concealed LEDs on all 4 sides.	22 - 2' x 2'	2' x 2'	2' x 4'	L30 - 80 CRI, 3000K L35 - 80 CRI, 3500K L40 - 80 CRI, 4000K L50 - 80 CRI, 5000K H30 - 90 CRI, 3000K H35 - 90 CRI, 3500K H40 - 90 CRI, 4000K TW - Tunable White 90 CRI, 2700-6000K	B5 - 5W Battery Pack B7 - 7W Battery Pack B10 - 10W Battery Pack B12 - 12W Battery Pack CEC - CEC Compliant (10W Battery Pack)
		20 - 2000 lumens (18W)	35 - 3500 lumens (32W)		
	25 - 2500 lumens (23W)	40 - 4000 lumens (37W)			
	30 - 3000 lumens (28W)	45 - 4500 lumens (42W)			
	35 - 3500 lumens (34W)	50 - 5000 lumens (47W)			
	40 - 4000 lumens (40W)	55 - 5500 lumens (52W)			
	45 - 4500 lumens (45W)	60 - 6000 lumens (58W)			
		65 - 6500 lumens (64W)			
	70 - 7000 lumens (70W)				

VOLTAGE	DRIVER ⁵	W LUMINAIRE FINISH	MOUNTING OPTIONS	OPTIONS
U - Universal 1 - 120 Volt 2 - 277 Volt	Dimming 0-10V D - Dim to 1% (Standard) DD⁷ - Dim to 1%, Fade to Off DD² - Eldoled Solodrive, Dim to 0% TW10 - 0-10v Tunable White LUTRON - See options on page 2 DALI Dimming ELE - Eldoled Ecodrive, Dim to 1% ELS - Eldoled Solodrive, Dim to 0% TWDA - DALI Tunable White	W - White (Standard)	FLG - Flange kit for sheet rock ceiling applications	CP - Chicago plenum SIC - Seismic clips GLR - Fusing FLEX3 - 6' of Flex, 3-wire FLEX5 - 6' of Flex, 5-wire ETS - Electronic transfer switch GTD - Generator transfer device UP - Unit pack

Notes:
1. Nominal lumen output for 3500K and 80 CRI


PHOTOMETRIC DATA

BRM4-22-32-L35
 ITL Test #: ITL94198
 Total Delivered Lumens: 3254
 Input Watts: 30.6

ZONAL LUMEN SUMMARY	ZONE	LUMENS	%FIXT
	0- 30	773	23.8
	0- 40	1277	39.2
	0- 60	2350	72.2
	0- 90	3254	100.0
	90-180	0	0.0
	0-180	3254	100.0

EFFICACY = 106.3 lm/W
 CIE TYPE - DIRECT
 PLANE : 0-DEG 90-DEG
 SPACING CRITERIA : 1.28 1.29
 BEAM ANGLE (50%) : 130.3 X 130.2 DEGREES
 FIELD ANGLE (10%) : 170.2 X 169.8 DEGREES
 LUMINOUS LENGTH : 20.688 20.688

LUMINANCE DATA IN CANDELA/SQ M			
ANGLE IN DEG	AVERAGE 0-DEG	AVERAGE 45-DEG	AVERAGE 90-DEG
45	3637.	3549.	3642.
55	3833.	3675.	3833.
65	4242.	3968.	4233.
75	4674.	4380.	4646.
85	4197.	3823.	3989.

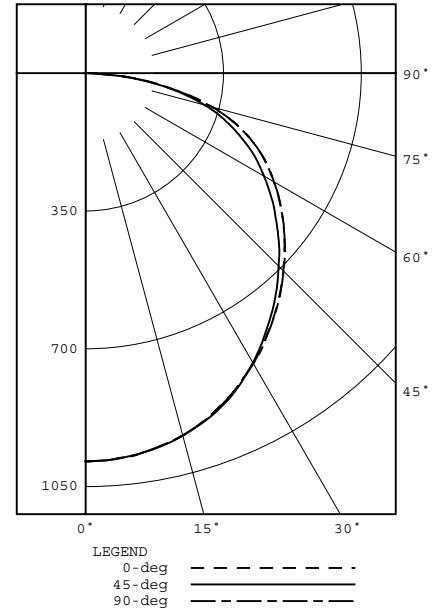

DRIVER INFORMATION

NULITE CAT#	DRIVER MANUFACTURER / SERIES	DIMMING / CONTROL PROTOCOL	DIM RANGE	NOTES/ DESCRIPTION
D	Signify Xitanium, Osram OT1	0-10v	100% -1%	Standard Nulite driver, reflects base fixture price
D0	Signify Xitanium, Osram OT1	0-10v	100%- 1% (Steps from 1% to 0% or OFF)	Standard Nulite driver, reflects base fixture price
D02	Eldoled Solodrive	0-10v	100% - 0%	Able to choose from 4 dimming curve options
L11	Lutron Hi-Lume Premier (PEQ0E) Max lumen package 03	0-10v	100% - 0.1%	Hi-lume Premier 0.1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology
L15	Lutron Hi-Lume Series (LDE1)	0-10v	100% - 1%	Hi-Lume 1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology
L16	Lutron 5 Series (LDE5)	0-10v	100% - 5%	5 Series EcoSystem LED Driver
ELE	Eldoled Ecodrive	DALI	100% - 1%	
ELS	Eldoled Solodrive	DALI	100% -1%	Able to choose from 2 dimming curve options
TW10	Eldoled Dual Drive combined with Dual 0-10v DALI Translator	Tunable White, 0-10v	100% - 0%	2 channel tunable white system mixes 2700K and 6000K LEDs on the same Nulite LED PCB to create any CCT between 2700K and 6000K. Two channel drivers will be programmed for constant lumen output throughout the CCT range.
TWDA	Eldoled Dual Drive	Tunable White, DALI	100% - 0%	

PRODUCT DETAILS

LIGHT SOURCE LED custom linear array is mounted with quick-connect wiring to facilitate service. A wide array of lumen packages are available. All luminaire configurations tested in accordance with IESNA LM-79. Diodes tested in accordance with IESNA LM-80.

DRIVER Standard constant current integral electronic driver with 0-10V dimming input standard; dimming range from 100% down to 1%. Dims to 0%, DALI, and Tunable white available. Universal (U), 120 volt (1), and 277 volt (2).

TUNABLE WHITE Aims to create environments that are optimal for visual, mental, and biological health. Two channel tunable white system mixes 2700K and 6000K LEDs on the same Nulite LED PCB to create any CCT between 2700K and 6000K. Two channel drivers will be programmed for constant lumen output throughout the CCT range.

OPTIONAL DALI Digital Addressable Lighting Interface is a simple two-wire control connection that goes to each fixture to form the control network. DALI enables dimmable transformers, relay modules, emergency fittings, and controllers from different manufacturers to be mixed and matched into a single control system, allowing LED drivers to be controlled independently from lighting control circuits.

OPTIONAL BATTERY AND EMERGENCY OPTIONS

Recyclable Ni-Cad battery pack, battery run time is 90 minutes. Recharge time of 24 hours. 6W or 10W battery packs are available. Total output is determined by exact efficacy of specific configuration multiplied by battery wattage (i.e. RP13-B-FF-05L35-1C-U-D-W-4 with a 10W battery pack is a 1220 battery lumen output). Battery option not available in less than 4' lengths. Entire direct fixture housing is on battery for lengths up to 5'. 4' of direct fixture is on battery for 6' - 8' housing lengths. For bi-direct fixtures less than 72", the battery will be split equal power for the direct and indirect portions. For bi-direct fixtures 72" and longer, the full power of the battery will power 4' of the direct portion. Emergency or night light circuit available.

MOUNTING Designed to install into most grid ceilings (1", 9/16", and Tegular or "Slot-T"). May also be installed into inaccessible ceilings with a separate flange kit (FLG).

WARRANTY 5-year limited warranty on LED and driver from date of shipment. Refer to the full warranty details on www.nulite-lighting.com.

LUMINAIRE LENGTH Standard luminaire sizes are nominal 2'x2', and 4'x4' designed to lay into common grid acoustical ceiling systems.

WEIGHT 2'x2'-12lbs, 2'x4'-24lbs.

APPROVALS ETL listed, conforms to UL Standard 1598 / 8750 and CSA Standard C22.2, indoor dry/damp locations.

INDEPENDENT TESTING

IESNA LM79 - Testing method for the Electrical and Photometric Measurements of Solid State Lighting on the complete system, such as luminous flux, electrical power, luminous intensity distribution, and various properties of chromaticity.

IESNA LM80 - Testing method for measuring lumen maintenance of LED light sources, applies to the LED package, array or module alone, not the complete system.