




NULITE

10770 EAST 51ST AVENUE / DENVER, COLORADO 80239

P 303 287 9646 / WWW.NULITE-LIGHTING.COM

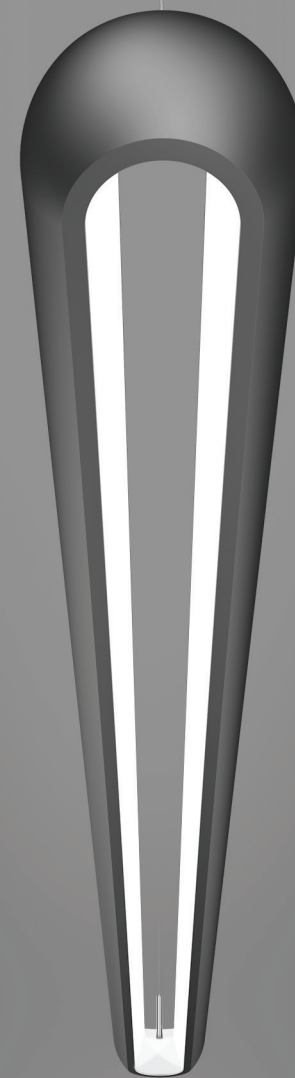



SERO

PENDANT LUMINAIRE

NULITE

# SERO

PENDANT LUMINAIRE

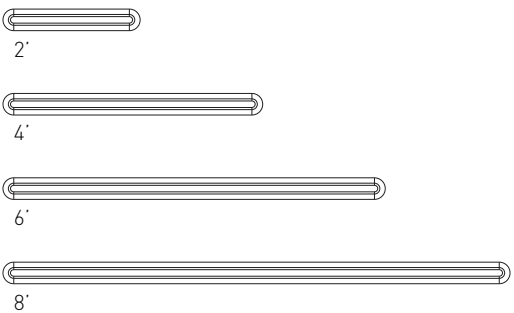

## SERIES

**SRO** - Sero pendant

## LIGHT DISTRIBUTION

**20** - 20% downlight / 80% Uplight

## LUMEN PACKAGE<sup>1</sup>/ CCT/ CRI

<b>08</b> - 750 Lms/ft	<b>L30</b> - 3000K, 80 CRI
<b>10</b> - 1000 Lms/ft	<b>L35</b> - 3500K, 80 CRI
<b>13</b> - 1250 Lms/ft	<b>L40</b> - 4000K, 80 CRI
<b>15</b> - 1500 Lms/ft	<b>H30</b> - 3000K, 90 CRI
<b>19</b> - 1850 Lms/ft	<b>H35</b> - 3500K, 90 CRI
	<b>H40</b> - 4000K, 90 CRI

## VOLTAGE

**UNV** - Universal Voltage  
**120** - 120 volts  
**277** - 277 volts

## DRIVER

### Dimming 0-10v

**D<sup>2</sup>** - Dim to 1%  
**D0<sup>2</sup>** - Dim to 0%

### Lutron Dimming

Refer to data sheet on website for ordering code

### DALI Dimming

**ELE** - Eldoled Ecodrive, dims to 1%  
**ELS** - Eldoled Solodrive, dims to 0%  
**ELD<sup>2</sup>** - Eldoled Dualdrive, dims to 0%

## CIRCUIT

**1C** - Single Circuit  
**1E** - Single Circuit with EM Circuit  
**1B** - Single Circuit with Battery Pack

## COLOR / FINISH

**WH** - White (Standard)  
**SV** - Silver  
**BK** - Black  
**CC** - Custom Color<sup>3</sup>

## MOUNTING/ DRIVER ENCLOSURE

### Grid Ceiling

**T1** - T1 Ceiling Grid  
**T9** - T9 Ceiling Grid  
**TS** - Slot T Grid

### Sheet Rock Ceiling

**GP** - Sheet Rock or inaccessible ceiling

### Ceiling Surface Mount

**SR** - Surface mount driver enclosure mounts to ceiling structure  
(Add "**B**" after mounting code for a black canopy)

## SUSPENSION LENGTH

**48** - 48" adjustable aircraft cable  
**120** - 120" adjustable aircraft cable


## LENGTH

**2'** - 2' Individual Luminaire  
**4'** - 4' Individual Luminaire  
**6'** - 6' Individual Luminaire  
**8'** - 8' Individual Luminaire  
**XX** - Continuous Row, specify run length in 2' increments

**CONSTRUCTION** Extruded aluminum housing with die cast aluminum end caps. Powder coat white finish is standard. Optional silver, black or custom colors. **OPTICS** Open optical system creates an optimal direct-indirect light distribution through the precise design and alignment of LED emitters and luminaire painted reflector surfaces. **DRIVER/ENCLOSURE** Standard constant current electronic driver housed in a separate enclosure with 0-10V dimming input; dimming range from 100% down to 1%, other dimming options are available. One remote driver enclosure per unit. Universal (UNV) voltage is from 120 - 277V, 50/60 Hz. Optional drivers available. **LED MODULE** Distributed LED array in a variety of lumen output packages. LED color is available in 3000K, 3500K or 4000K with CRI of 80 or 90. Modules are replaceable. L90 ≥ 100,000 hours. **MOUNTING** Pendant, individual or continuous run. **LABELS** ETL listed, conforms to UL Standard 1598 / 8750 and CSA Standard C22.2. Damp location. **WARRANTY** 5-year limited warranty on LED and Driver.


### Notes:

1. Nominal lumen output for 3500k
2. Consult factory for specifications and manufacturer
3. Consult factory for availability

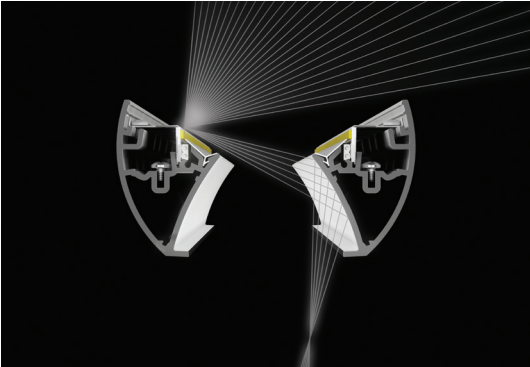


## ADVANCED OPTICS

Sero's open optical system creates an optimal direct-indirect light distribution through the precise design and alignment of LED emitters and luminaire reflective surfaces.

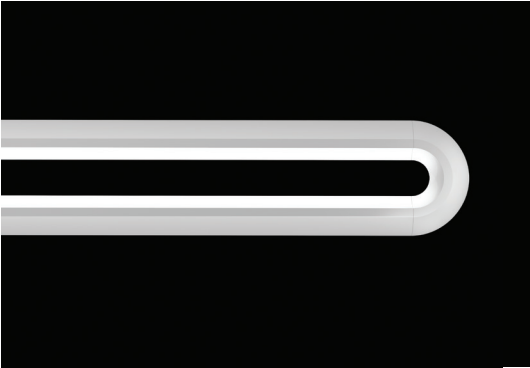

## MODERN DESIGN

Sero's timeless and minimalist design complements any interior architectural environment.

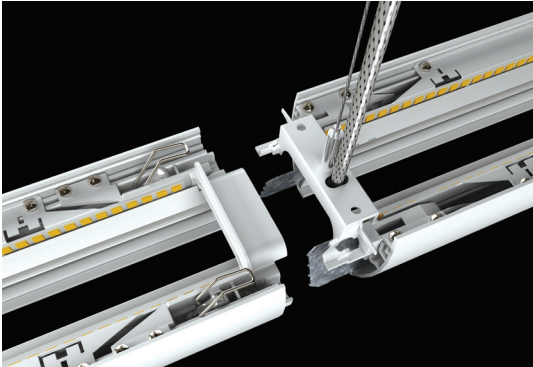

## INNOVATIVE ENGINEERING

Nulite's highly engineered luminaire joining design allows for simple and intuitive assembly in the field without tools. It's torsion latches act as springs and ensure that luminaire rows snap into a laser straight line.



## SIMPLE INSTALLATION

Unique small-scale canopy power supply works with all types of ceilings while fitting into the tightest spaces. Innovative canopy design allows for driver access without removing the luminaire.